



EMC Test Report

Report No.: AGC05443230405EE01

PRODUCT DESIGNATION	:	TWS earbuds with charging base
BRAND NAME	:	N/A
MODEL NAME	:	M06128, M06780
APPLICANT	:	MID OCEAN BRANDS B.V
DATE OF ISSUE	:	Jul. 03, 2023
STANDARD(S)	:	ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-17 V3.2.4 (2020-09)
REPORT VERSION	:	V1.0 V1.0 V1.0 V1.0 V1.0 V1.0 V1.0 V1.0
<u>Attestation of</u>	<u>Gl</u>	obal Compliance (Shenzhen) Co., Ltd





Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jul. 03, 2023	Valid	Initial Release



TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	
2. GENERAL INFORMATION	5
2.1. DESCRIPTION OF EUT	5
2.2. OBJECTIVE	5
2.3. TEST STANDARDS AND RESULTS	
2.4. TEST ITEMS AND THE RESULTS	6
2.5. ENVIRONMENTAL CONDITIONS	
3. TEST MODE DESCRIPTION	
4. MEASUREMENT UNCERTAINTY	8
5. SUPPORT EQUIPMENT	9
6. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	
7. RADIATED DISTURBANCE MEASUREMENT	11
7.1. LIMITS OF RADIATED DISTURBANCES	11
7.2. TEST PROCEDURE	11
7.3. BLOCK DIAGRAM OF TEST SETUP	12
7.4 TEST RESULT	13
8. IMMUNITY TEST	17
8.1. DESCRIPTION OF PERFORMANCE CRITERIA	17
8.2. GENERAL PERFORMANCE CRITERIA	17
8.3. ELECTROSTATIC DISCHARGE IMMUNITY TEST	19
8.4. RADIATED, RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	25
APPENDIX B: PHOTOGRAPHS OF THE EUT	27



1. TEST REPORT CERTIFICATION

Applicant	MID OCEAN BRANDS B.V			
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.			
Manufacturer	MID OCEAN BRANDS B.V			
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.			
Factory	MID OCEAN BRANDS B.V			
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.			
Product Designation	TWS earbuds with charging base			
Brand Name	N/A			
Test Model	MO6128			
Series Model	MO6780			
Declaration Difference	All the same except for the model name and shell.			
Date of receipt of test item	Jun. 19, 2023			
Date of test	Jun. 19, 2023 to Jul. 03, 2023			
Deviation	None			
Condition of Test Sample	Normal			
Test Result	Pass			
Report Template	AGCRT-EC-EMC			

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the Technical Standards mentioned above. The test record, data evaluation and test configuration represented herein are true and accurate accounts of measurements of the sample's EMC characteristics under the conditions herein specified.

The test results of this report relate only to the tested sample identified in this report

Prepared By

えいしう

Cici Ci (Project Engineer)

Jul. 03, 2023

Reviewed By

Calvin Liu (Reviewer)

Jul. 03, 2023

Approved By

Max Zhang

Max Zhang (Authorized Officer)

Jul. 03, 2023



2. GENERAL INFORMATION

2.1. DESCRIPTION OF EUT

The EUT is a short range, Bluetooth device.

Details of technical specification refer to the description in follows:

Operating Frequency	2402MHz~2480MHz	
Bluetooth Version	V5.0	
Modulation	BR: \boxtimes GFSK EDR: $\boxtimes \pi$ /4-DQPSK, \boxtimes 8DPSK	
Hardware Version	V1	
Software Version	V1	
Antenna Type	Ceramic Antenna	
Number of channels	79	
Antenna Gain	-0.58dBi	
Power Supply (Headset)	DC 3.7V by battery	
Power Supply (Charging dock)	DC 3.7V by battery or DC 5V by adapter	
Note: The EUT doesn't support BLE.		

2.2. OBJECTIVE

Perform Electro Magnetic Interference (EMI) and Electro Magnetic Susceptibility (EMS) tests for CE Marking.

2.3. TEST STANDARDS AND RESULTS

The EUT has been tested according to ETSI EN 301 489-1 V2.2.3 (2019-11) and

ETSI EN 301 489-17 V3.2.4 (2020-09).				
	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part			
ETSI EN 301 489-1	1: Common technical requirements; Harmonised Standard for ElectroMagnetic			
Compatibility.				
	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;			
ETSI EN 301 489-17	Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised			
	Standard for ElectroMagnetic Compatibility			



2.4. TEST ITEMS AND THE RESULTS

No.	Basic Standard	Test Type	Result		
EMIS	EMISSION (EN 301 489-1 §7.1)				
1	EN 55032	Radiated emission	PASS		
3	EN 55032	Conducted emission, AC ports	N/A		
4	EN 55032	Conducted emission, Telecom ports	N/A		
5	EN 61000-3-2	Harmonic current emissions	N/A		
6	EN 61000-3-3	oltage fluctuations & flicker N/A			
ІММ	UNITY (EN 301 489-1	§7.2)			
7	EN 61000-4-2	Electrostatic discharge immunity	PASS		
8	EN 61000-4-3	Radiated RF electromagnetic field immunity	PASS		
9	EN 61000-4-4	Electrical fast transient/burst immunity	N/A		
10	ISO 7637-1, -2	Transients and surges, DC ports	N/A		
11	EN 61000-4-5	Surge immunity, AC ports, Telecom ports	N/A		
12	EN 61000-4-6	Immunity to conducted disturbances induced by RF fields	N/A		
13	EN 61000-4-11	Voltage dips and short interruptions immunity	N/A		

Note:

1. N/A- Not Applicable.

2. The latest versions of basic standards are applied.

2.5. ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Relative humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa



3. TEST MODE DESCRIPTION

NO.	TEST MODE DESCRIPTION	WORST			
1	BT mode	V			
Note: 1	Note: 1. V means EMI worst mode.				

I/O Port Information (Applicable Ivot Applicable)

I/O Port of EUT				
I/O Port Type Number Cable Description Tested With				
Charging Port (for headset)	2		2	



4. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±2.9dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9dB



5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	specification
Xiaomi phone	Xiaomi	Mi 10		

Note:

1. "-- "means no any support device during testing.



6. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 02, 2022	Sep. 01, 2024
Wideband Antenna	SCHWARZBEC K	VULB9168	VULB9168-49 4	Jan. 05, 2023	Jan. 04, 2025
Test Software	FARA	EZ-EMC(Ver.RA- 03A)	N/A	N/A	N/A
Test Software	Tonscend	JS32-RE(Ver.2.5)	N/A	N/A	N/A

TEST EQUIPMENT OF ESD TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
ESD Simulator	Schaffner	NSG 438	782	Dec. 30, 2022	Dec. 29, 2023

TEST EQUIPMENT OF RS IMMUNITY TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Signal Generator	Aglient	E4421B	MY43351603	Feb. 17, 2023	Feb. 16, 2024
Power Probe	R&S	URV5-Z4	100124	Mar. 24, 2023	Mar. 23, 2025
Power Meter	R&S	NRVD	8323781027	Mar. 24, 2023	Mar. 23, 2025
Power Amplifier	L2	S2006-0001	BPA00T10W 500-1	N/A	N/A
Power Amplifier	Milmega	AS0104-55_55	1004793	N/A	N/A
Power Amplifier	Rflight	NTWPA-25601 00	17063183	N/A	N/A
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-4 94	Jan. 05, 2023	Jan. 04, 2025
Bi-log antenna	ETS	3142C	920250	Jun. 08, 2022	Jun. 07, 2024



7. RADIATED DISTURBANCE MEASUREMENT

7.1. LIMITS OF RADIATED DISTURBANCES

Limits for radiated disturbance 30M to1 GHz at a measurement distance of 3 m

Frequency range (MHz)	Quasi peak limits(dBuV/m), for Class B ITE, at 3m measurement distance
30 - 230	40
230 - 1000	47

Limits for radiated disturbance above 1 GHz at a measurement distance of 3 m

	Limits (dBuV/m), Class B ITE				
Frequency range (MHz)	Peak	Average			
1000-3000MHz	70	50			
3000-6000MHz	74	54			

Notes:

1. The lower limit shall apply at the transition frequency.

2. Additional provisions may be required for cases where interference occurs.

7.2. TEST PROCEDURE

(1). The EUT was placed on the top of an insulating table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

(2). The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

(3). The antenna is a broadband antenna, and its height is varied from 1 to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

(4). For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the heights from 1 to 4 meters and the ratable table was turned from 0 degrees to 360 degrees to find the maximum reading.


(5). The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10dB margin would be retested one by one using the quasi-peak method.




7.3. BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

Radiated Disturbance below 1 GHz

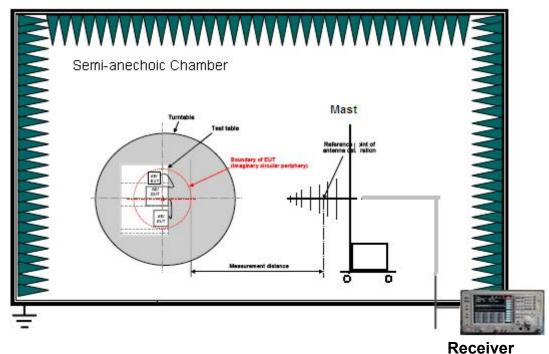

Radiated Disturbance above 1 GHz

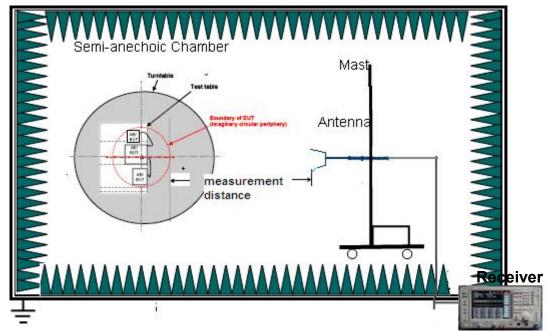


For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.4 TEST RESULT

The test modes were carried out for all modes.


The worst test mode of the EUT was Mode 1, and its test data was showed as the follow: RADIATED EMISSION BELOW 1GHZ– HORIZONTAL

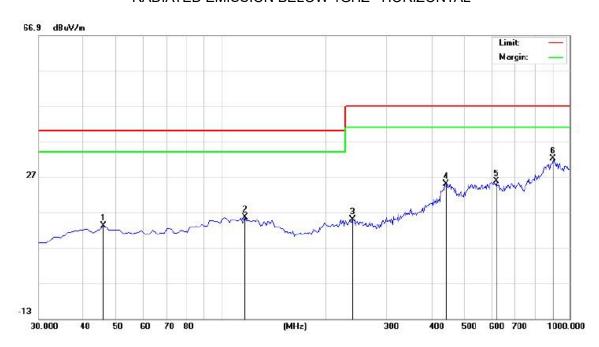

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		46.1667	-0.21	13.47	13.26	40.00	-26.74	peak
2		117.3000	-0.71	16.37	15.66	40.00	-24.34	peak
3		240.1667	-0.35	15.39	15.04	47.00	-31.96	peak
4		442.2500	0.05	25.02	25.07	47.00	-21.93	peak
5		616.8500	0.69	25.18	25.87	47.00	-21.13	peak
6	*	899.7667	0.34	31.77	32.11	47.00	-14.89	peak

RESULT: PASS



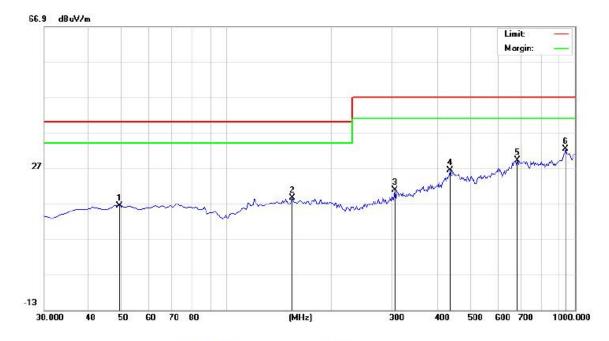


RADIATED EMISSION BELOW 1GHZ- VERTICAL

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		49.4000	- <mark>0</mark> .51	16.99	16.48	40.00	-23.52	peak
2		154.4832	0.36	18.20	18.56	40.00	-21.44	peak
3		304.8333	1.54	19.24	20.78	47.00	-26.22	peak
4		440.6333	0.39	26.07	26.46	47.00	-20.54	peak
5		686.3667	1.46	27.83	29.29	47.00	-17.71	peak
6	*	941.8000	1.40	30.93	32.33	47.00	-14.67	peak

RESULT: PASS



RADIATED EMISSION ABOVE 1GHZ-HORIZONTAL

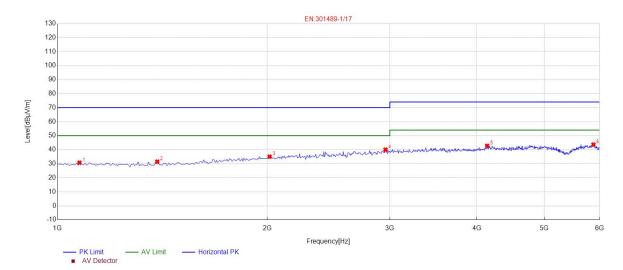


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1075.0751	30.71	-19.85	70.00	39.29	100	320	Horizontal
2	1390.3904	31.47	-19.91	70.00	38.53	100	100	Horizontal
3	2016.016	35.03	-15.93	70.00	34.97	100	310	Horizontal
4	2956.957	40.06	-11.39	70.00	29.94	100	240	Horizontal
5	4138.1381	42.81	-7.93	74.00	31.19	100	270	Horizontal
6	5879.8799	43.66	-5.29	74.00	30.34	100	260	Horizontal

RESULT: PASS



RADIATED EMISSION ABOVE 1GHZ- VERTICAL

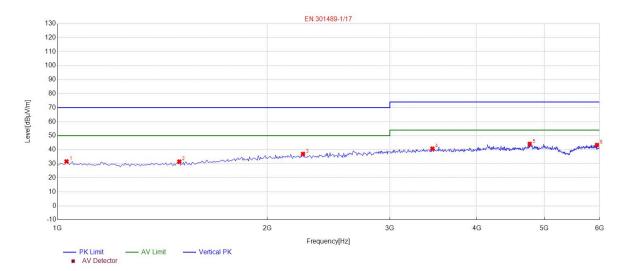

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1030.03	31.65	-19.85	70.00	38.35	100	300	Vertical
2	1495.4955	31.51	-19.93	70.00	38.49	100	330	Vertical
3	2251.2513	37.00	-14.56	70.00	33.00	100	70	Vertical
4	3452.4525	40.73	-9.85	74.00	33.27	100	20	Vertical
5	4763.7638	44.13	-6.88	74.00	29.87	100	110	Vertical
6	5949.95	43.35	-5.05	74.00	30.65	100	350	Vertical

RESULT: PASS



8. IMMUNITY TEST

8.1. DESCRIPTION OF PERFORMANCE CRITERIA

The performance criteria are used to take a decision on whether a radio equipment passes or fails immunity tests.

For the purpose of the present document two categories of performance criteria apply:

- Performance criteria for continuous phenomena.
- Performance criteria for transient phenomena.

8.2. GENERAL PERFORMANCE CRITERIA

1. Performance criteria for continuous phenomena

During the test, the equipment shall:

- continue to operate as intended;
- not unintentionally transmit;
- not unintentionally change its operating state;
- not unintentionally change critical stored data.

2. Performance criteria for transient phenomena

For all ports and transient phenomena with the exception described below, the following applies:

- The application of the transient phenomena shall not result in a change of the mode of operation
- (e.g. unintended transmission) or the loss of critical stored data.
- After application of the transient phenomena, the equipment shall operate as intended.

For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the following criteria applies:

• For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be otherwise restored. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

• For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

For a 0 % residual voltage dip tests the following performance criteria apply:

• The performance criteria for transient phenomena shall apply.

For a 70 % residual voltage dip and voltage interruption tests, the following performance criteria apply:

- in the case where the equipment is fitted with or connected to a battery back-up, the performance criteria
- for transient phenomena shall apply;

• in the case where the equipment is powered solely from the AC mains supply (without the use of a solelated residence) and report having not been standed by authorized approver, or having been attended residence and the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



parallel battery back-up) volatile user data may have been lost and if applicable the communication link need not to be maintained and lost functions should be recoverable by user or operator;

- no unintentional responses shall occur at the end of the test, when the voltage is restored to nominal;
- in the event of loss of function(s) or in the event of loss of user stored data, this fact shall be recorded.

3. Performance Table

EN 301 489-17 Performance criteria				
Criteria	During Test	After Test (i.e. as a result of the application of the test)		
A	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.		
В	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.		
С	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.		

The performance criteria A shall apply for continuous phenomena.

The performance criteria B shall apply for transient phenomena, except for voltage dips greater than or equal to 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply. Where the EUT is a transmitter in standby mode or receive mode, unintentional transmission shall not occur during the test.

Note: Operate as intended during the test allows a level of degradation in accordance with the Minimum performance level.

Minimum performance level

For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.



8.3. ELECTROSTATIC DISCHARGE IMMUNITY TEST

8.3.1 TEST SPECIFICATION	
Basic Standard	EN 61000-4-2
Discharge Impedance	330Ω / 150 pF
Discharge Voltage Air Discharge:8 kV , Contact Discharge:4 kV	
Polarity	Positive / Negative
Number of Discharge	Minimum 20 times at each test point
Discharge Mode	Single discharge
Discharge Period	1-second minimum

8.3.1 TEST SPECIFICATION


8.3.2 TEST PROCEDURE

The test procedure was in accordance with EN 61000-4-2:

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were completed.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m×0.5m) was placed vertically to and 0.1 meters from the EUT.



8.3.3 TEST SETUP

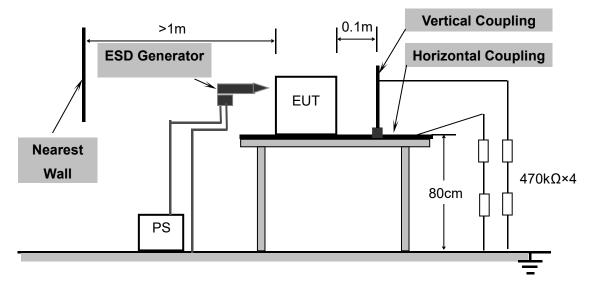

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration. ESD location:

Yellow line: Air discharge Red line: Contact discharge





8.3.4 TEST RESULT

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.3.2 and EN 61000-4-2 for the measurement methods.

Times of Discharge	Voltage	Coupling	Test Mode	Performance criteria
Mini 25 / Point	±2kV; ±4kV	Contact discharge	Mode 1	А
Mini 25 / Point	±2kV; ±4kV; ±8kV	Air Discharge	Mode 1	А
Mini 25 / Point	±4kV	Indirect Discharge HCP	Mode 1	А
Mini 25 / Point	±4kV	Indirect Discharge VCP	Mode 1	А
A: No degradation in the performance of the EUT was observed.				

PERFORMANCE

⊠ Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
🗌 Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

≥ PASS □ FAIL



8.4. RADIATED, RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST

8.4.1 TEST SPECIFICATION				
Basic Standard	EN 61000-4-3			
Frequency Range	80 MHz – 6000MHz			
Field Strength	3V/m			
Modulation	1 kHz sine wave, 80%, AM modulation			
Frequency Step	1% of fundamental			
Polarity of Antenna	Horizontal and Vertical			
Test Distance	3m			
Antenna Height	1.55m			
Dwell Time	3 seconds			


8.4.2 TEST PROCEDURE

The test procedure was in accordance with EN 61000-4-3.

- a. The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- b. The test signal was 80% amplitude modulated with a 1 kHz sine wave.
- c. The frequency range was swept from 80 MHz to 6000MHz with the exception of the exclusion band for transmitters, receivers and duplex transceivers. The rate of sweep did not exceed 1.5×10⁻³ decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- d. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- e. The field strength level was 3V/m.
- f. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.



8.4.3 TEST SETUP

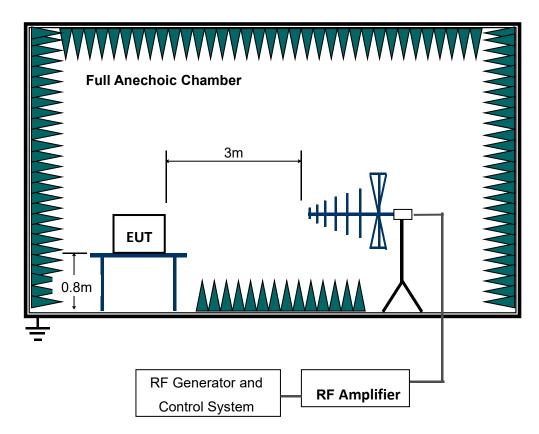

For the actual test configuration, please refer to Appendix II: Photographs of the Test Configuration.



8.4.4 TEST RESULT

TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 9.2.2, ETSI EN 301 489-17 and EN 61000-4-3 for the measurement methods.

Freq. Range (MHz)	Field	Modulation	Polarity	Position	Test Mode	Performance criteria
80-6000	3V/m	Yes	Н	Front	Mode 1	А
80-6000	3V/m	Yes	н	Back	Mode 1	А
80-6000	3V/m	Yes	Н	Left	Mode 1	А
80-6000	3V/m	Yes	н	Right	Mode 1	A
80-6000	3V/m	Yes	V	Front	Mode 1	A
80-6000	3V/m	Yes	V	Back	Mode 1	A
80-6000	3V/m	Yes	V	Left	Mode 1	А
80-6000	3V/m	Yes	V	Right	Mode 1	A
A: No degradation or PER < 10% in the performance of the EUT was observed.						

PERFORMANCE


⊠ Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
□ Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

 \square PASS \square FAIL




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHZ

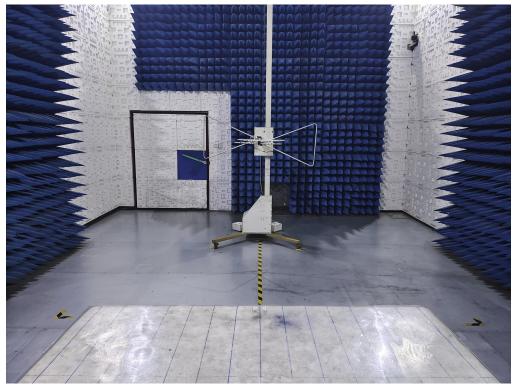

RADIATED EMISSION TEST SETUP ABOVE 1GHZ

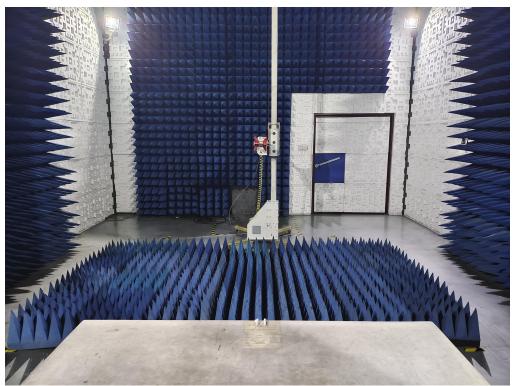

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




Report No.: AGC05443230405EE01 Page 26 of 27


EN 61000-4-2 ESD TEST SETUP



EN 61000-4-3 RS TEST SETUP BELOW 1GHZ

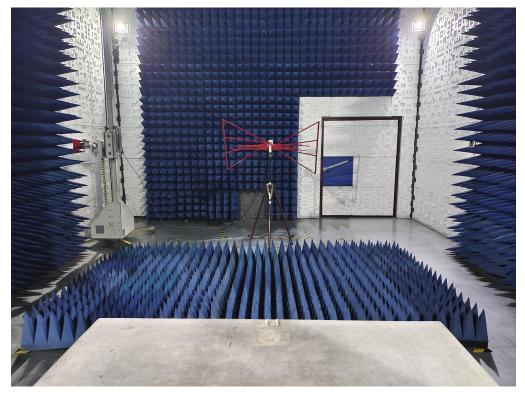



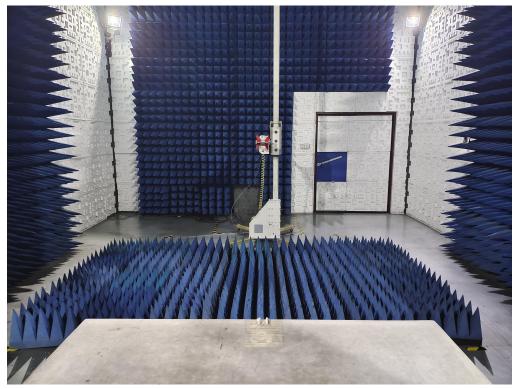

EN 61000-4-3 RS TEST SETUP ABOVE 1GHZ

APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC05443230405AP01

----END OF REPORT----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.



EMC Test Report

Report No.: AGC05443230405EE02

PRODUCT DESIGNATION	:	TWS earbuds with charging base
BRAND NAME	:	N/A
MODEL NAME	:	M06128, M06780
APPLICANT	:	MID OCEAN BRANDS B.V
DATE OF ISSUE	:	Jul. 03, 2023
STANDARD(S)	:	EN 55032: 2015/A11:2020 EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A2:2021 EN 55035:2017/A11:2020
REPORT VERSION	:	V1.0
	1	Constance Green Henry Constant
<u>Attestation of G</u>	10	bal Compliance (Shenzhen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jul. 03, 2023	Valid	Initial release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. SYSTEM DESCRIPTION	6
3. MEASUREMENT UNCERTAINTY	7
4. PRODUCT INFORMATION	8
5. SUPPORT EQUIPMENT	9
6. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	10
7. EN 55032 LINE CONDUCTED EMISSION TEST	13
7.1. LIMITS OF LINE CONDUCTED EMISSION TEST	13
7.2. BLOCK DIAGRAM OF TEST SETUP	13
7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST	14
7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST	15
8. EN 55032 RADIATED EMISSION TEST	17
8.1. LIMITS OF RADIATED DISTURBANCES	
8.2. BLOCK DIAGRAM OF TEST SETUP	
8.3. PROCEDURE OF RADIATED EMISSION TEST	19
8.4. TEST RESULT OF RADIATED EMISSION TEST	20
9. POWER HARMONICS TEST	24
9.1. BLOCK DIAGRAM OF TEST SETUP	24
9.2. RESULT	24
10. VOLTAGE FLUCTUATION / FLICKER TEST	25
10.1. BLOCK DIAGRAM OF TEST SETUP	25
10.2. RESULT	
11. ESD IMMUNITY TEST	27
11.1. BLOCK DIAGRAM OF TEST SETUP	
11.2. TEST PROCEDURE	28
11.3. PERFORMANCE & RESULT	
11.4. PERFORMANCE	
12. RADIATED, RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST	31



12.2. TEST PROCEDURE	31
12.3. TEST SETUP	
12.4. TEST RESULT	33
12.5. PERFORMANCE	
13. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	34
13.1. TEST SPECIFICATION	
13.2. TEST PROCEDURE	34
13.3. TEST SETUP	34
13.4. TEST RESULT	
13.5. PERFORMANCE	35
14. SURGE IMMUNITY TEST	
14.1. TEST SPECIFICATION	
14.2. TEST PROCEDURE	
14.3. TEST SETUP	
14.4. TEST RESULT	37
14.5. PERFORMANCE	
15. IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS	
15.1. TEST SPECIFICATION	
15.2. TEST PROCEDURE	
15.3. TEST SETUP	
15.4. TEST RESULT	
15.5. PERFORMANCE	
16. VOLTAGE DIPS AND SHORT INTERRUPTIONS IMMUNITY TEST	40
16.1. TEST SPECIFICATION	
16.2. TEST PROCEDURE	40
16.3. TEST SETUP	40
16.4. TEST RESULT	41
16.5. PERFORMANCE	41
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	42
APPENDIX B: PHOTOGRAPHS OF EUT	47



1. VERIFICATION OF CONFORMITY

Applicant	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer	MID OCEAN BRANDS B.V
Address 7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, H Kong.	
Factory	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Product Designation	TWS earbuds with charging base
Brand Name	N/A
Test Model	MO6128
Series Model	MO6780
Declaration Difference	All the same except for the model name and shell.
Date of receipt of test item	Jun. 19, 2023
Date of test	Jun. 19, 2023 to Jul. 03, 2023
Deviation	None
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-EC-IT/AC(2013-03-01)

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements of Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment.

The test results of this report relate only to the tested sample identified in this report.

Prepared By

AS li

Cici Ci (Project Engineer)

Jul. 03, 2023

Reviewed By

hin Lin

Calvin Liu (Reviewer)

Jul. 03, 2023

Approved By

Max Lrang

Max Zhang (Authorized Officer)

Jul. 03, 2023



2. SYSTEM DESCRIPTION

TEST MODE DESCRIPTION						
NO. EMI TEST MODE DESCRIPTION WORST						
1	1 Standby with charging V					
NO.	NO. EMS TEST MODE DESCRIPTION WORST					
1	1 Standby with charging V					
Note: 1. V means EMI worst mode.						



3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by ISO.

- Uncertainty of Conducted Emission, Uc = ±2.9 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9 dB



4. PRODUCT INFORMATION

Housing Type	Plastic and wood	
Power Supply (Headset) DC 3.7V by battery		
Power Supply (Charging dock) DC 3.7V by battery or DC 5V by adapter		
Hardware Version	V1	
Software Version	V1	

I/O Port Information (X Applicable V Not Applicable)

I/O Port of EUT					
I/O Port Type	Number	Cable Description	Tested With		
Type-C Port (charging dock)	1		1		
Charging Port(Microscope)	2		2		



5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model	Data Cable
Adapter	jinbaotong	K-T10E0502000E	AC100-240V,50-60Hz,0.35A,DC5V/2A
Type-C Cable			0.6m unshielded

Note: 1."-- "means no any support device during testing.

2. All the cables were provided by AGC Lab.



6. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESPI	101206	Aug. 04, 2022	Aug. 03, 2023
Artificial power network	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test Software	FARA	EZ-EMC(Ver. AGC-CON03A1)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024	
Wideband	SCHWARZBE	VULB9168	VULB9168-494	Jan. 05, 2023	lon 04 2025	
Antenna	СК	VULD9100	VULD9100-494	Jan. 05, 2025	Jan. 04, 2025	
Double-Ridged	ETS-LINDGR	3117	00034609	Mar. 23, 2023	Mar. 22, 2024	
Waveguide Horn	EN	5117	00034009	Wal. 23, 2023	Wal. 22, 2024	
Preamplifier	ETS	3117PA	00225134	Sep. 02, 2022	Sop 01 2024	
Assembly	EIS	STITPA	00223134	Sep. 02, 2022	Sep. 01, 2024	
EXA Signal	Agliopt	N0010A	MX52470504	Aug. 04, 2022	Aug. 03, 2023	
Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023	
Test Software	FARA	EZ-EMC(Ver.RA-	N/A	N/A	N/A	
Test Soltware	FARA	03A)	IN/A	IN/A	IN/A	
Test Software	Tonscend	JS32-RE(Ver.2.5)	N/A	N/A	N/A	

TEST EQUIPMENT OF POWER HARMONICS / VOLTAGE FLUCTUATION / FLICKER TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Signal Conditioning Unit	Schaffner	CCN1000-1	72431	Jul. 06, 2022	Jul. 05, 2023
AC Source	Schaffner	NSG1007	56825	Jun. 02, 2023	Jun. 01, 2024

TEST EQUIPMENT OF ESD TEST

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., LtdAttestation of Global Compliance(Shenzhen)Std & Tech Co., LtdTel: +86-755 2523 4088E-mail: agc@agccert.comWeb: http://www.agccert.com/



Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
ESD Simulator	Schaffner	NSG 438	782	Dec. 30, 2022	Dec. 29, 2023



TEST EQUIPMENT OF SURGE/EFT/DIPS TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
EFT/Surge	Schaffner	Modulo 6150	34437	lup 09 2022	lup 07 2024
Generator	Schanner	Modula 6150	34437	Jun. 08, 2023	Jun. 07, 2024

TEST EQUIPMENT OF RS IMMUNITY TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
Signal Generator	Aglient	E4421B	MY43351603	Feb. 17, 2023	Feb. 16, 2024	
Power Probe	R&S	URV5-Z4	100124	Mar. 24, 2023	Mar. 23, 2025	
Power Meter	R&S	NRVD	8323781027	Mar. 24, 2023	Mar. 23, 2025	
Dower Amplifier	L2	S2006-0001	BPA00T10W	N/A	N/A	
Power Amplifier	LZ	32000-0001	500-1	N/A	IN/A	
Power Amplifier	Milmega	AS0104-55_55	1004793	N/A	N/A	
Power Amplifier	Dflight	NTWPA-2560	17063183	N/A	N1/A	
Power Ampliner	Rflight	100	17003103	N/A	N/A	
Horn antenna	SCHWARZBACK	BBHA9120 J	N/A	Jun. 08, 2022	Jun. 07, 2024	
Bi-log antenna	ETS	3142C	920250	Jun. 08, 2022	Jun. 07, 2024	

TEST EQUIPMENT OF CS IMMUNITY TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
Power Amplifier	AR	75A250	18464	N/A	N/A	
CDN	ZHINAN	ZN3751	15004	Aug. 03, 2022	Aug. 02, 2024	
6dB attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024	
Power Probe	R&S	URV5-Z4	100124	Mar. 24, 2023	Mar. 23, 2025	
Electromagnetic	Luthi	EM101	35773	Aug. 12, 2022	Aug. 11, 2024	
Injection Clamp	Luthi	LINITOT	33773	Aug. 12, 2022	Aug. 11, 2024	
Power Meter	R&S	NRVD	8323781027	Mar. 24, 2023	Mar. 23, 2025	
Signal Generator	Aglient	E4421B	MY43351603	Feb. 17, 2023	Feb. 16, 2024	



7. EN 55032 LINE CONDUCTED EMISSION TEST


7.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency		Maximum RF Line Voltage				
	Frequency	Q.P.(dBuV)	Average(dBuV)			
	150kHz-500kHz	66-56	56-46			
	500kHz-5MHz	56	46			
	5MHz-30MHz	60	50			

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP

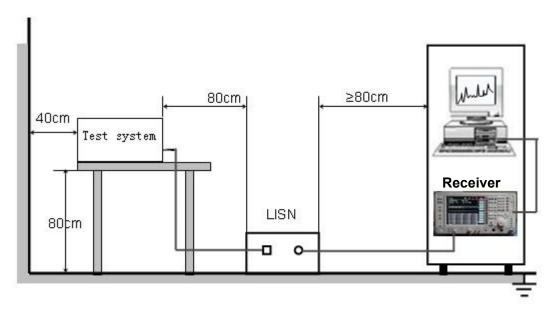




7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN55032 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per EN55032.
- (3) All I/O cables were positioned to simulate typical actual usage as per EN55032.
- (4) The EUT received charging voltage by adapter through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received power from a second LISN supplying power of AC 230V/50Hz, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- (8) During the above scans, the emissions were maximized by cable manipulation.
- (9) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (10) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.



7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST



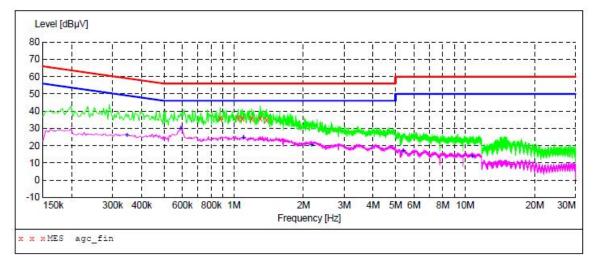

MEASUREMENT RESULT: "agc_fin"

2023/6/22 0:19

120/0/22 0.1.	<i>.</i>					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.874000	35.80	6.2	56	20.2	QP	L1
1.046000	36.00	6.2	56	20.0	QP	L1
1.090000	36.00	6.2	56	20.0	QP	L1
1.194000	35.70	6.2	56	20.3	QP	L1
1.302000	35.90	6.2	56	20.1	QP	L1
1.386000	34.70	6.2	56	21.3	QP	L1


MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.346000	26.00	6.1	49	23.1	AV	L1
0.590000	29.90	6.2	46	16.1	AV	L1
1.102000	24.30	6.2	46	21.7	AV	L1
2.170000	20.40	6.2	46	25.6	AV	L1
5.390000	16.80	6.4	50	33.2	AV	L1
10.714000	13.60	6.7	50	36.4	VA	L1

RESULT: PASS



LINE CONDUCTED EMISSION TEST-N

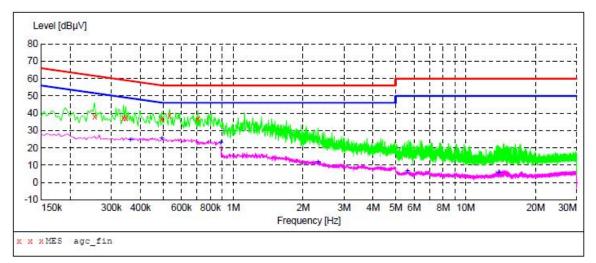

MEASUREMENT RESULT: "agc_fin"

2023/6/22 0:25

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.254000	38.40	6.1	62	23.2	QP	N
0.338000	37.30	6.1	59	22.0	QP	N
0.346000	37.40	6.1	59	21.7	QP	N
0.494000	36.90	6.1	56	19.2	QP	N
0.534000	38.60	6.1	56	17.4	QP	N
0.706000	36.60	6.2	56	19.4	QP	N

MEASUREMENT RESULT: "agc_fin2"

2023/6/22	0:20	5					
Frequen M	cy Hz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.3620	00	24.70	6.1	49	24.0	AV	N
0.4940	00	25.40	6.1	46	20.7	AV	N
0.8860	00	23.00	6.2	46	23.0	VA	N
2.3220	00	12.00	6.3	46	34.0	VA	N
5.6260	00	6.80	6.4	50	43.2	VA	N
13.8860	00	5.50	6.9	50	44.5	AV	N

RESULT: PASS



8. EN 55032 RADIATED EMISSION TEST 8.1. LIMITS OF RADIATED DISTURBANCES

AT 3M DISTANCES

For class B equipment

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m Q.P.)
30-230	3	40
230-1000	3	47

For class B equipment

	Limits (dBuV/m), Class B ITE			
Frequency range (MHz)	Peak	Average		
1000-3000	70	50		
3000-6000	74	54		

For FM receivers


Frequency	Distance	Maximum Field Strength Limit (dBuV/m Q.P.)		
(MHz)	(m)	Fundamental	Harmonics	
30-230	3	60	52	
230-300	3		52	
300-1000	3		56	

Note: The lower limit shall apply at the transition frequency.



Receiver

8.2. BLOCK DIAGRAM OF TEST SETUP

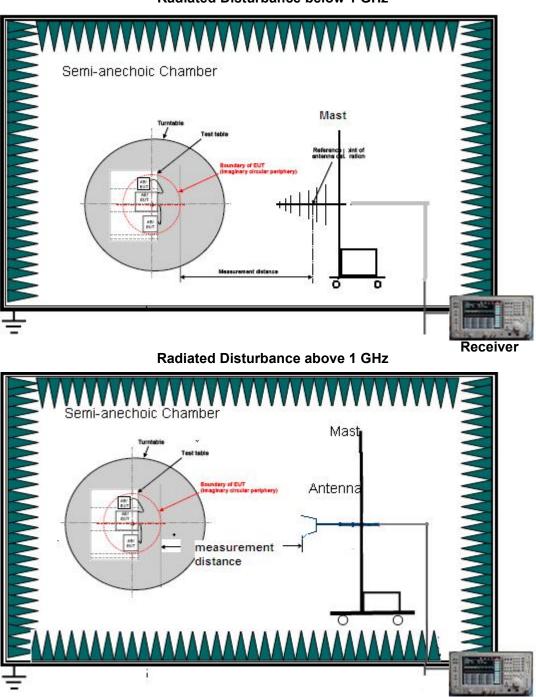

Radiated Disturbance below 1 GHz



8.3. PROCEDURE OF RADIATED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per EN 55032 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per EN 55032.
- (3) All I/O cables were positioned to simulate typical actual usage as per EN 55032.
- (4) The EUT received charging voltage by Adapter which got power through the outlet socket under the turntable. All support equipment received AC 230V/50Hz power from socket under the turntable, if any.
- (5) The antenna was placed at 3 meters away from the EUT as stated in EN 55032. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- (6) For the test below 1GHz, the Analyzer / Receiver quickly scanned from 30MHz to 1000MHz using 100 kHz RBW and 300 kHz VBW. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and the antenna height scan shall be restricted to a range of 1 m to 4 m above the RGP, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- (7) For the test above 1GHz, the Analyzer / Receiver quickly scanned from 1 GHz to the highest measured frequency using 1 MHz RBW and 3 MHz VBW. The highest measured frequency is defined in Table 1 of CISPR 32. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and the antenna height scan shall encompass those heights defined in Figure 14, Figure 15 and Table 2 of CISPR 16-2-3:2010 AMD1:2010, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- (8) The test mode(s) were scanned during the test:
- (9) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. For testing below 1GHz, the emissions level of the EUT in peak mode was lower than Q.P. limit (that means the emissions level in Q.P. mode also complies with the limit in Q.P. mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in Q.P. mode again and reported. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




66.9 dBuV/m Limit Margin: 27 -13 60 70 80 (MHz) 300 400 600 700 1000.000 30,000 50 500 40 Reading Correct Measure-No. Mk. Limit Over Freq. Level Factor ment MHz dBuV dBuV/m dB dB/m dB Detector 1 16.21 17.05 -22.95 101.1333 0.84 40.00 peak * 217.5333 27.48 2 13.07 14.41 40.00 -12.52 peak 3 25.33 447.1000 0.48 24.85 47.00 -21.67 peak 526.3167 24.79 25.91 -21.09 4 1.12 47.00 peak -20.04 5 600.6833 1.86 25.10 26.96 47.00 peak 904.6167 32.79 47.00 6 1.64 31.15 -14.21 peak

RADIATED EMISSION BELOW 1GHZ-HORIZONTAL

8.4. TEST RESULT OF RADIATED EMISSION TEST

RESULT: PASS



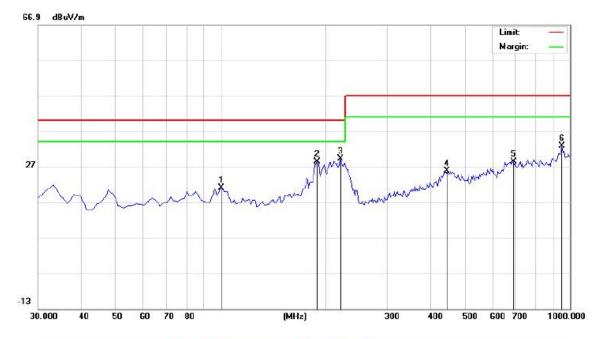


RADIATED EMISSION BELOW 1GHZ- VERTICAL

No.	Mk	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		101.1333	6.70	14.40	21.10	40.00	-18.90	peak
2		190.0500	10.26	18.20	28.46	40.00	-11.54	peak
3	*	220.7667	12.89	16.39	29.28	40.00	-10.72	peak
4		443.8667	-0.14	25.93	25.79	47.00	-21.21	peak
5		689.6000	0.59	27.89	28.48	47.00	-18.52	peak
6		951.5000	2.21	30.54	32.75	47.00	-14.25	peak

RESULT: PASS



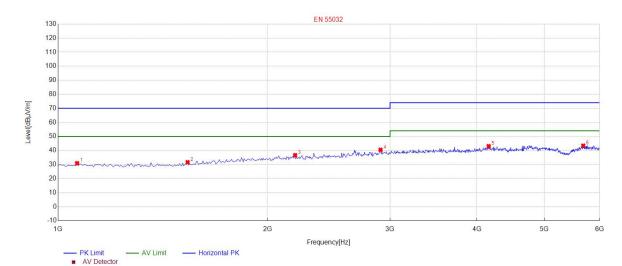


RADIATED EMISSION ABOVE 1GHz - HORIZONTAL

NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Dolority
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	1065.0651	30.92	-19.85	70.00	39.08	100	20	Horizontal
2	1535.5355	31.61	-19.65	70.00	38.39	100	90	Horizontal
3	2191.1912	36.63	-14.91	70.00	33.37	100	40	Horizontal
4	2906.9069	40.45	-11.58	70.00	29.55	100	20	Horizontal
5	4158.1582	43.05	-7.91	74.00	30.95	100	230	Horizontal
6	5684.6847	43.42	-5.96	74.00	30.58	100	270	Horizontal

RESULT: PASS



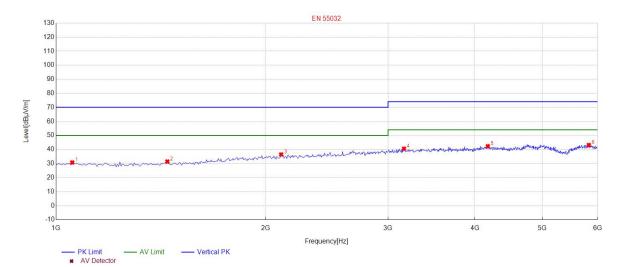

RADIATED EMISSION ABOVE 1GHz - VERTICAL

NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Dolority
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	1055.0551	30.73	-19.85	70.00	39.27	100	150	Vertical
2	1445.4454	31.40	-19.92	70.00	38.60	100	340	Vertical
3	2106.1061	36.44	-15.40	70.00	33.56	100	170	Vertical
4	3162.1622	40.52	-10.73	74.00	33.48	100	190	Vertical
5	4173.1732	42.31	-7.89	74.00	31.69	100	260	Vertical
6	5829.8298	43.15	-5.47	74.00	30.85	100	300	Vertical


RESULT: PASS



9. POWER HARMONICS TEST

Port	AC mains
Basic Standard	EN IEC 61000-3-2
Limits	\boxtimes CLASS A; \square CLASS B; \square CLASS C; \square CLASS D
Temperature	25.2°C
Relative Humidity	68.0%

9.1. BLOCK DIAGRAM OF TEST SETUP

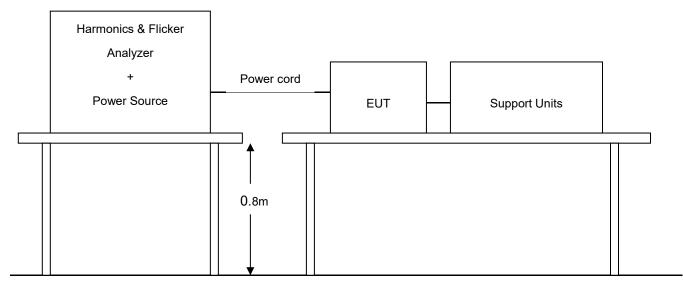

9.2. RESULT

Test Specification

Test Frequency	50Hz	Test Voltage	230V AC
Waveform	Sine	Test Time	2.5min
Classification	Class A		

Note: 1.The active input power of the EUT is less than 75W.

2. No limits apply for equipment with an active input power up to and including **75W**.




10. VOLTAGE FLUCTUATION / FLICKER TEST

VOLTAGE FLUCTUATION/FLICKER MEASUREMENT

Port	AC mains
Basic Standard	EN 61000-3-3
Limits	§5 of EN 61000-3-3
Temperature	25.2°C
Relative Humidity	68.0%

10.1. BLOCK DIAGRAM OF TEST SETUP

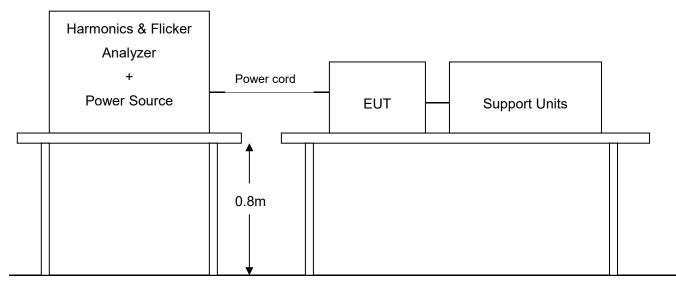




10.2. **RESULT**


Flicker Test Summary per EN/IEC61000-3-3 (Run time)

Test Result: Pass


Status: Test Completed



European Limits

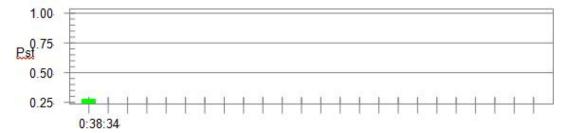

Plt and limit line

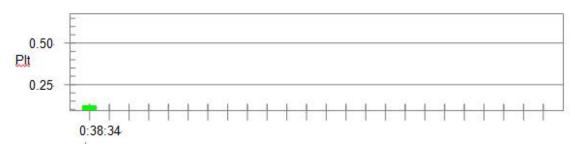

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.91			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.273	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.119	Test limit:	0.650	Pass




11. ESD IMMUNITY TEST ELECTROSTATIC DISCHARGE (ESD) IMMUNITY TEST

Port	Enclosure			
Basic Standard	EN 61000-4-2			
Test Level	8.0 kV (Air Discharge) 4.0 kV (Contact Discharge) 4.0 kV (Indirect Discharge)			
Standard require	В			
Temperature	23.0°C			
Relative Humidity	47.0%			

11.1. BLOCK DIAGRAM OF TEST SETUP

(The 470 k ohm resistors are installed per standard requirement)

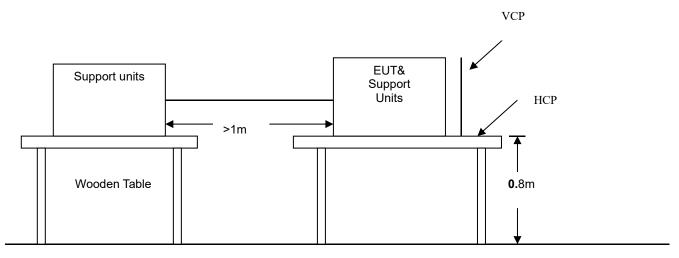

Ground Reference Plane

For the actual test configuration, please refer to Appendix A : Photographs of the Test Configuration.



11.2. TEST PROCEDURE

The EUT was located 0.1 m minimum from all side of the HCP.

The support units were located 1 m minimum away from the EUT.

EUT worked with resistance load, and make sure EUT worked normally.

Actives the communication function if the EUT with such port(s).

As per the requirement of EN 55035: Contact discharge is the preferred test method. 20 discharges (10 with positive and 10 negative polarity) shall be applied on each accessible metal part of the enclosure. In case of a non-conductive enclosure, discharges shall be applied on the horizontal or vertical coupling planes as

specified in EN 61000-4-2.

Air discharges shall be used where contact discharges cannot be applied.

The following test condition was followed during the tests.

Note: As per the A2 to EN 61000-4-2, a bleed resistor cable is connected between the EUT and HCP during the test.

The electrostatic discharges were applied as follows:

11.3. PERFORMANCE & RESULT


Amount of Discharges	Voltage	Coupling	Performance	Conclusion
Mini 20 /Point	±4kV	Contact Discharge	A	PASS
Mini 20 /Point	±4kV	Indirect Discharge HCP (Front)	A	PASS
Mini 20 /Point	±4kV	Indirect Discharge HCP (Left)	A	PASS
Mini 20 /Point	±4kV	Indirect Discharge HCP (Back)	A	PASS
Mini 20 /Point	±4kV	Indirect Discharge HCP (Right)	A	PASS
Mini 20 /Point	±4kV	Indirect Discharge VCP (Front)	A	PASS
Mini 20 /Point	±4kV	Indirect Discharge VCP (Left)	A	PASS
Mini 20 /Point	±4kV	Indirect Discharge VCP (Back)	A	PASS
Mini 20 /Point	±4kV	Indirect Discharge VCP (Right)	A	PASS
Mini 20 /Point	±8kV	Air Discharge	A	PASS



Report No.: AGC05443230405EE02 Page 29 of 60

ESD LOCATION:

Yellow line: Air discharge Red line: Contact discharge

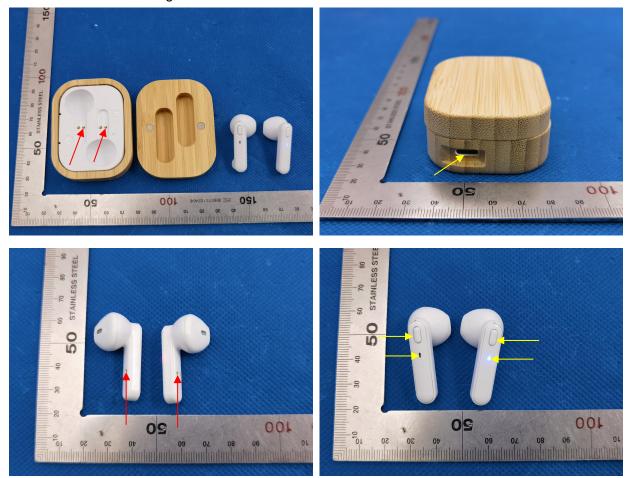



11.4. PERFORMANCE

🖂 Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

⊠ Compliance □ Not Compliance



12. RADIATED, RADIO FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST 12.1. TEST SPECIFICATION

Basic Standard	EN 61000-4-3		
Frequency Range	80-1000, 1800, 2600, 3500, 5000(MHz)		
Field Strength	3V/m		
Modulation	1 kHz sine wave, 80%, AM modulation		
Frequency Step	1% of fundamental		
Polarity of Antenna	Horizontal and Vertical		
Test Distance	3m		
Antenna Height	1.5m		
Dwell Time	3 seconds		


12.2. TEST PROCEDURE

The test procedure was in accordance with EN 61000-4-3.

- a. The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- b. The test signal was 80% amplitude modulated with a 1 kHz sine wave.
- c. The frequency range was swept at 80-1000, 1800, 2600, 3500, 5000(MHz) with the exception of the exclusion band for transmitters, receivers and duplex transceivers. The rate of sweep did not exceed 1.5×10⁻³ decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- d. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- e. The field strength level was 3V/m.
- f. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.



12.3. TEST SETUP

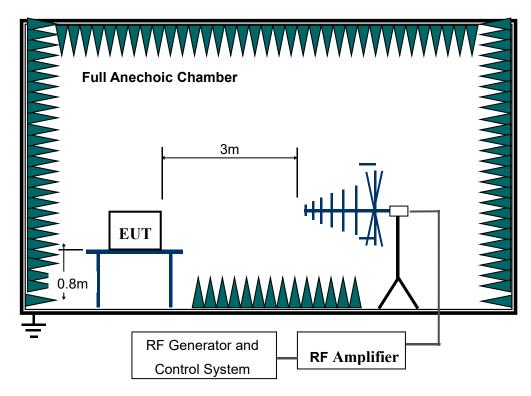

For the actual test configuration, please refer to Appendix A : Photographs of the Test Configuration.



12.4. TEST RESULT

Freq. Range (MHz)	Field	Modulation	Polarity	Position	Observation	performance	Conclusion
80-1000,1800,26 00,3500,5000	3V/m	Yes	H/V	Front	No Function Loss	A	PASS
80-1000,1800,26 00,3500,5000	3V/m	Yes	H/V	Back	No Function Loss	А	PASS
80-1000,1800,26 00,3500,5000	3V/m	Yes	H/V	Left	No Function Loss	А	PASS
80-1000,1800,26 00,3500,5000	3V/m	Yes	H/V	Right	No Function Loss	А	PASS
80-1000,1800,26 00,3500,5000	3V/m	Yes	H/V	Тор	No Function Loss	А	PASS
80-1000,1800,26 00,3500,5000	3V/m	Yes	H/V	Bottom	No Function Loss	A	PASS

Note: operating mode include all modes of EMS in page 6.

12.5. PERFORMANCE

⊠ Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. The measured acoustic interference ratio during the test are less than -20 dB.	
🗆 Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.	
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.	
🖂 Compliance 🗌 Not Compliance		



13. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST


13.1. TEST SPECIFICATION

Basic Standard	EN 61000-4-4
Test Voltage	a.c. power port \pm 1kV
Polarity	Positive/Negative
Impulse Frequency	5kHz
Impulse wave shape	5/50ns
Burst Duration	15ms
Burst Period	300ms
Test Duration	Not less than 1 min.

13.2. TEST PROCEDURE

- 1. The EUT was tested with 1000 volt discharges to the AC power input leads.
- 2. Both positive and negative polarity discharges were applied.
- 3. The length of the "hot wire" from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
- 4. The duration time of each test sequential was 1 minute.
- 5. The transient/burst waveform was in accordance with EN 61000-4-4, 5/50ns.

13.3. TEST SETUP

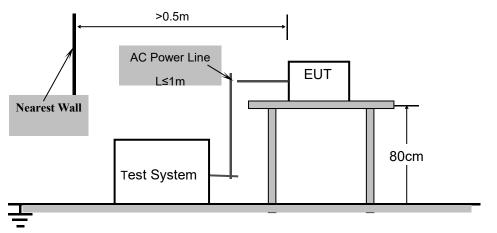

For the actual test configuration, please refer to Appendix A : Photographs of the Test Configuration.



13.4. TEST RESULT

Test Point	Polarity	Test Level (kV)	Observation	performance	Conclusion
a.c. port, L	+/-	1	No function loss	А	Pass
a.c. port, N	+/-	1	No function loss	A	Pass
a.c. port, L-N	+/-	1	No function loss	A	Pass

Note: operating mode include all modes of EMS in page 6.

13.5. PERFORMANCE

🛛 Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
□ Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

⊠ Compliance □ Not Compliance




14. SURGE IMMUNITY TEST

14.1. 1251 SPECIFICATIO	N			
Basic Standard	EN 61000-4-5			
Waveform	Itage 1.2/50 μs; Current 8/20 μs			
Test Voltage	c. power port, line to line ± 1.0 kV			
Polarity	ositive/Negative			
Phase Angle	90°, 270°			
Repetition Rate	60sec			
Times	5 time/each condition.			

14.2. TEST PROCEDURE

- a. The EUT and the auxiliary equipment were placed on a table of 0.8m heights above a metal ground reference plane. The size of ground plane is greater than 1m×1m and project beyond the EUT by at least 0.1m on all sides. The ground plane is connected to the protective earth. The length of power cord between the coupling device and the EUT was less than 2 meters (provided by the manufacturer).
- b. The EUT was connected to the power mains through a coupling device that directly couples the surge interference signal. The surge noise was applied synchronized to the voltage phase at the zero crossing and the peak value of the AC voltage wave (positive and negative).
- c. The surges were applied line to line and line(s) to earth. When testing line to earth the test voltage was applied successively between each of the lines and earth. Steps up to the test level specified increased the test voltage. All lower levels including the selected test level were tested. The polarity of each surge level included positive and negative test pulses.

14.3. TEST SETUP

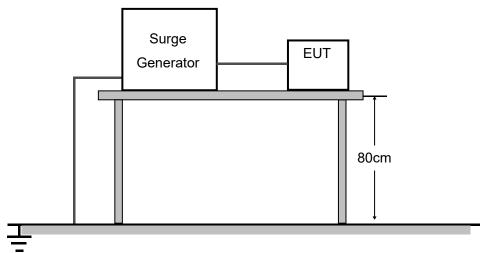

For the actual test configuration, please refer to Appendix A : Photographs of the Test Configuration.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



14.4. TEST RESULT

Coupling Line	Polarity	Voltage (kV)	Observation	performance	Conclusion
a.c. power, L-N	+/-	1.0	No function loss	А	Pass

Note: operating mode include all modes of EMS in page 6.

14.5. PERFORMANCE

⊠ Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
□ Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

⊠ Compliance □ Not Compliance




15.1. TEST SPECIFICATION Basic Standard EN 61000-4-6 Frequency Range 0.15 MHz – 80 MHz Field Strength 0.15~10MHz 3Vrms,10~30MHz 3 to 1Vrms,30~80MHz 1Vrms Modulation 1 kHz Sine Wave, 80% AM Frequency Step 1% of fundamental Coupled Cable a.c. power line Coupling Device CDN-M2

15. IMMUNITY TO CONDUCTED DISTURBANCES INDUCED BY RF FIELDS

15.2. TEST PROCEDURE

- 1. The EUT shall be tested within its intended operating and climatic conditions.
- 2. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.
- 3. The test signal was 80% amplitude modulated with a 1 kHz sine wave
- 4. The frequency range is swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80% amplitude. The sweep rate shall not exceed 1.5×10-3 decades/s. The step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value where the frequency is swept incrementally.
- 5. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequencies and harmonics or frequencies of dominant interest, shall be analyzed separately.
- 6. Attempts should be made to fully exercise the EUT during test, and to fully interrogate all exercise modes selected for susceptibility.

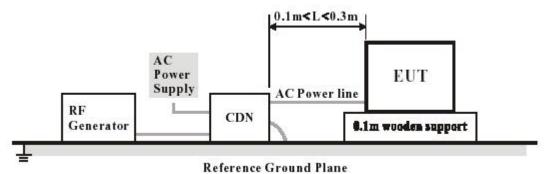

15.3. TEST SETUP

For the actual test configuration, please refer to Appendix A : Photographs of the Test Configuration.



15.4. TEST RESULT

EUT Working Mode	Test Point	Frequency (MHz)	Field Strength (Vrms)	Observation	performance	Conclusion
Normal	a.c. port	0.15 – 10	3	No function loss	А	Pass
Normal	a.c. port	10 – 30	3 to1	No function loss	А	Pass
Normal	a.c. port	30 - 80	1	No function loss	А	Pass

Note: operating mode include all modes of EMS in page 6.

15.5. PERFORMANCE

⊠ Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.
	The measured acoustic interference ratio during the test are less than -20 dB.
🗌 Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.
Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.

🖂 Compliance 🗌 Not Compliance



16. VOLTAGE DIPS AND SHORT INTERRUPTIONS IMMUNITY TEST

16.1. TEST SPECIFICATION

Basic Standard	EN 61000-4-11		
Valtara Dina	100% reduction, 0.5 Cycle		
Voltage Dips	30% reduction, 25 Cycles		
Voltage Interruptions	100% reduction, 250 Cycles		
Voltage Phase Angle	0°, 45°, 90°, 135°, 180°, 225°, 270°, 315°		


16.2. TEST PROCEDURE

a).The power cord was used as supplied by the manufacturer. The EUT was connected to the line output of the Voltage Dips and Interruption Generator.

b). The EUT was tested for (1) 100% voltage dip of supplied voltage with duration of 0.5 cycles, (2) 30% voltage dip of supplied voltage and duration 25 cycles. (3) 100% voltage interruption of supplied voltage with duration of 250 Cycles was followed.

c).Voltage reductions occur at 0 degree crossover point of the voltage waveform. The performance of the EUT was checked after the voltage dip or interruption.

16.3. TEST SETUP

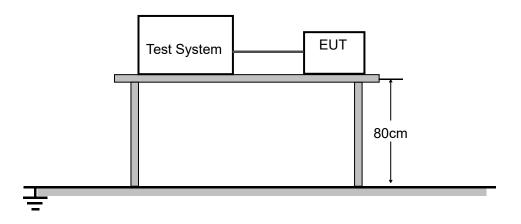

For the actual test configuration, please refer to Appendix A : Photographs of the Test Configuration.



16.4. TEST RESULT

Test Mode	Voltage Reduction	Duration (cycle)	Times	Interval (ms)	Observation	performance	Conclusion
Voltage dips	100%	0.5	3	10	No function loss	В	Pass
	30%	25	3	500	No function loss	С	Pass
Voltage	100%	250	3	5000	No function loss	С	Pass
interruptions							

Note: operating mode include all modes of EMS in page 6.

16.5. PERFORMANCE

🗆 Criteria A:	The apparatus continues to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance.	
⊠ Criteria B:	The apparatus continues to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. In some cases the performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed.	
⊠ Criteria C:	Temporary loss of function is allowed, provided the functions self recoverable or can be restored by the operation of controls.	

🛛 Compliance 🗌 Not Compliance




Report No.: AGC05443230405EE02 Page 42 of 60

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

LINE CONDUCTED EMISSION TEST SETUP




RADIATED EMISSION TEST SETUP (Below 1GHz)

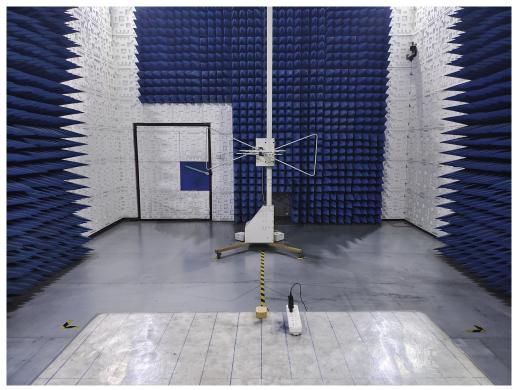

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



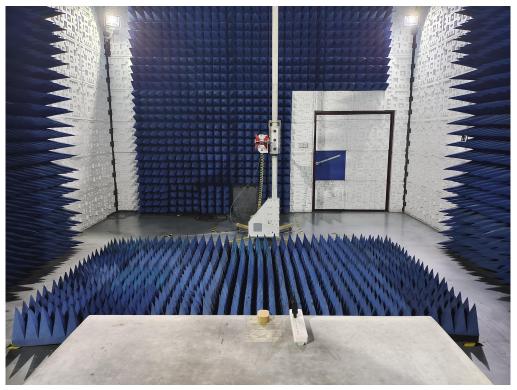

RADIATED EMISSION TEST SETUP (Above 1GHz)


EN61000-3-3 VOLTAGE FLUCTUATION ANDFLICKER TEST SETUP






Report No.: AGC05443230405EE02 Page 44 of 60


EN 61000-4-2 ESD TEST SETUP

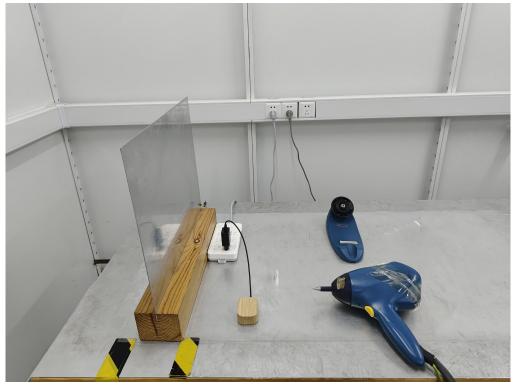

EN 61000-4-3 RS TEST SETUP (Below 1GHz)

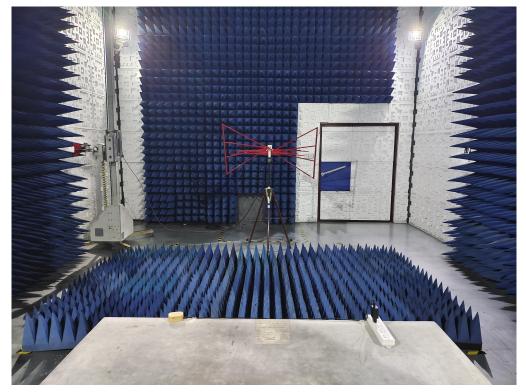



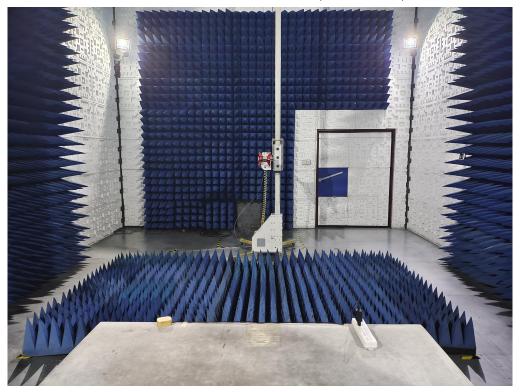

EN 61000-4-3 RS TEST SETUP (Above 1GHz)

EN 61000-4-4/5/11 EFT/SURGE/DIPS IMMUNITY TEST SETUP




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC05443230405EE02 Page 46 of 60



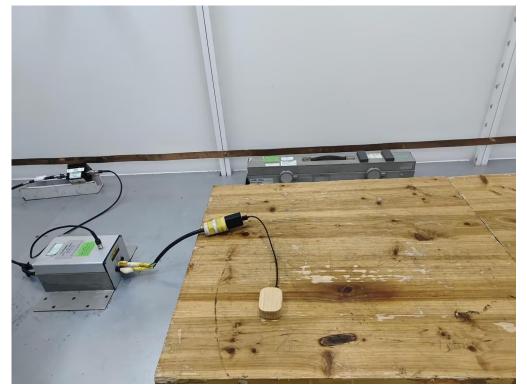

Report No.: AGC05443230405EE02 Page 47 of 60



APPENDIX B: PHOTOGRAPHS OF EUT

The model: MO6128

WHOLE VIEW OF EUT



TOP VIEW OF EUT





Report No.: AGC05443230405EE02 Page 48 of 60

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT





BACK VIEW OF EUT



LEFT VIEW OF EUT




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



RIGHT VIEW OF EUT




OPEN VIEW OF EUT

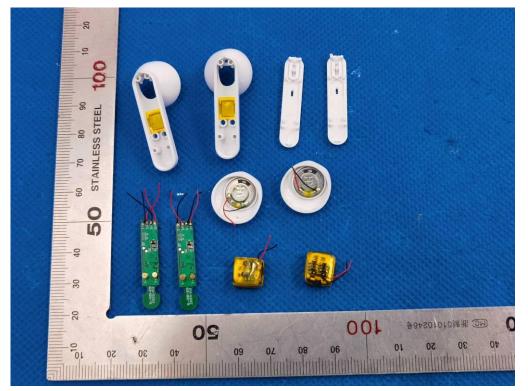




VIEW OF BATTERY

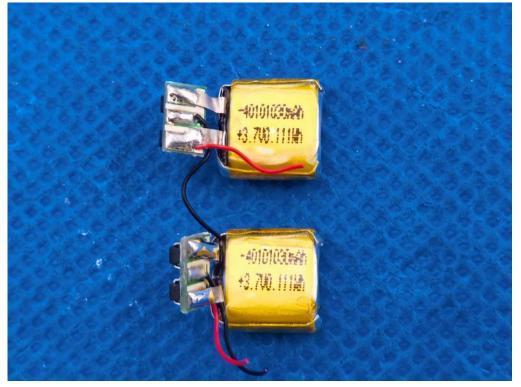


INTERNAL VIEW OF EUT (FIGURE 1)

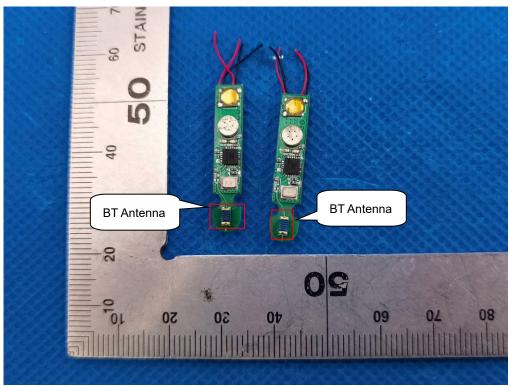


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



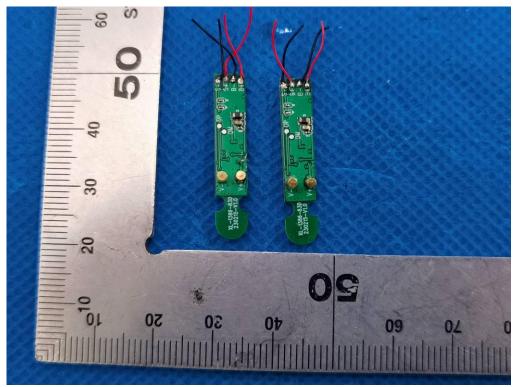


INTERNAL VIEW OF EUT (FIGURE 2)

INTERNAL VIEW OF EUT (FIGURE 3)

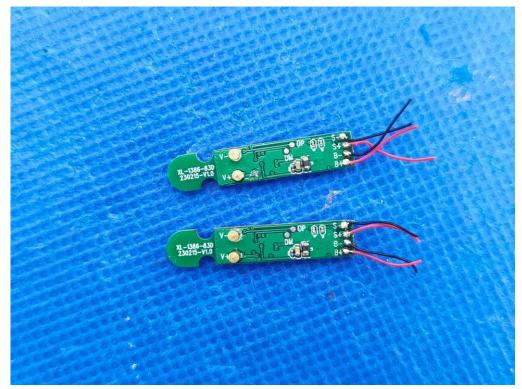



INTERNAL VIEW OF EUT (FIGURE 4)

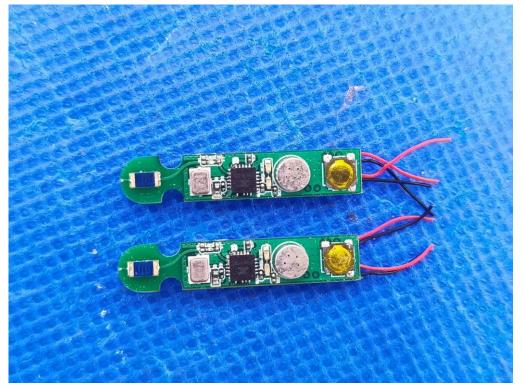

Charging Dock TOP VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



BOTTOM VIEW OF EUT




FRONT VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



BACK VIEW OF EUT

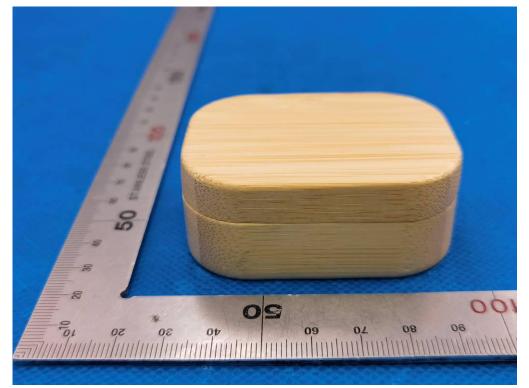

LEFT VIEW OF EUT






RIGHT VIEW OF EUT




OPEN VIEW OF EUT

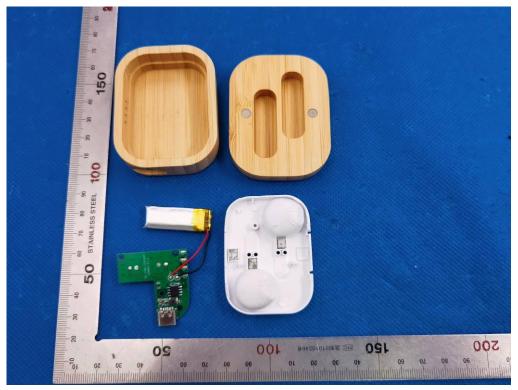




VIEW OF BATTERY

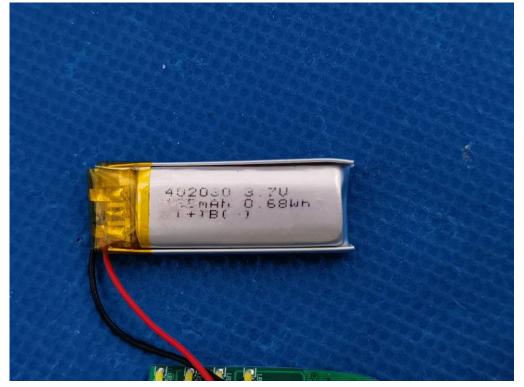


INTERNAL VIEW OF EUT (FIGURE 1)

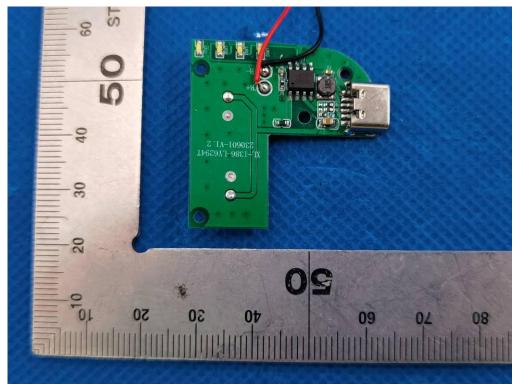


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



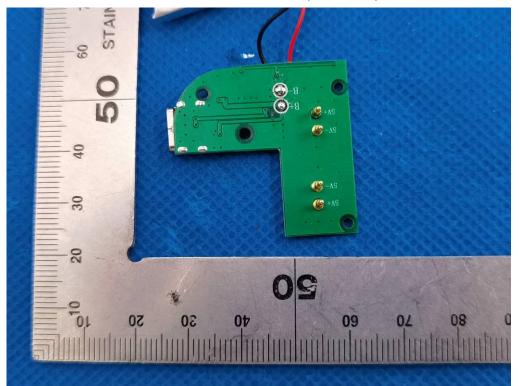

INTERNAL VIEW OF EUT (FIGURE 2)

The model: MO6780 WHOLE VIEW OF EUT-1

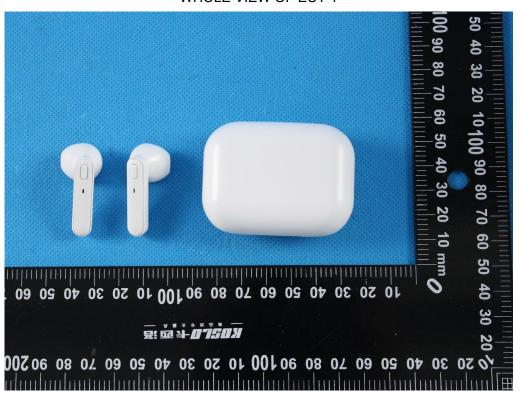



WHOLE VIEW OF EUT-2





Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.