



TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
1.5 EUT SETUP AND OPERATION MODE.....	7
1.6 PERFORMANCE CRITERIA FOR EMS.....	8
1.7 MEASUREMENT UNCERTAINTY.....	9
1.8 TEST EQUIPMENT LIST AND DETAILS.....	10
2. SUMMARY OF TEST RESULTS.....	14
3. CONDUCTED EMISSIONS.....	15
3.1 TEST PROCEDURE.....	15
3.2 BASIC TEST SETUP BLOCK DIAGRAM.....	15
3.3 ENVIRONMENTAL CONDITIONS.....	15
3.4 CONDUCTED EMISSIONS TEST DATA.....	15
4. RADIATED EMISSIONS.....	20
4.2 TEST PROCEDURE.....	20
4.2 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	20
4.3 ENVIRONMENTAL CONDITIONS.....	21
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	21
5. HARMONIC CURRENT EMISSIONS.....	25
5.1 TEST PROCEDURE.....	25
5.2 TEST SETUP BLOCK DIAGRAM.....	25
5.3 TEST STANDARDS.....	25
5.4 ENVIRONMENTAL CONDITIONS.....	25
5.5 HARMONIC CURRENT EMISSIONS TEST DATA.....	25
6. VOLTAGE FLUCTUATION AND FLICKER.....	26
6.1 TEST PROCEDURE.....	26
6.2 TEST SETUP BLOCK DIAGRAM.....	26
6.3 TEST STANDARDS.....	26
6.4 ENVIRONMENTAL CONDITIONS.....	26
6.5 VOLTAGE FLUCTUATION AND FLICKER TEST DATA.....	26
7. ELECTROSTATIC DISCHARGE (ESD).....	28
7.1 TEST PROCEDURE.....	28
7.2 TEST SETUP BLOCK DIAGRAM.....	28
7.3 TEST PERFORMANCE.....	28
7.4 ENVIRONMENTAL CONDITIONS.....	28
7.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST DATA.....	28
8. RADIO FREQUENCY ELECTROMAGNETIC FIELD (R/S).....	30
8.1 TEST PROCEDURE.....	30
8.2 TEST SETUP BLOCK DIAGRAM.....	30
8.3 TEST PERFORMANCE.....	30
8.4 ENVIRONMENTAL CONDITIONS.....	30
8.5 CONTINUOUS RADIATED DISTURBANCES TEST DATA.....	30
9. FAST TRANSIENTS, COMMON MODE (EFT).....	32
9.1 TEST PROCEDURE.....	32
9.2 TEST SETUP BLOCK DIAGRAM.....	32
9.3 TEST PERFORMANCE.....	32
9.4 ENVIRONMENTAL CONDITIONS.....	32
9.5 ELECTRICAL FAST TRANSIENTS TEST DATA.....	32



10. SURGES	34
10.1 TEST PROCEDURE	34
10.2 TEST SETUP BLOCK DIAGRAM.....	34
10.3 TEST PERFORMANCE	34
10.4 ENVIRONMENTAL CONDITIONS.....	34
10.5 SURGE TEST DATA.....	34
11. RADIO FREQUENCY, COMMON MODE (C/S)	36
11.1 TEST PROCEDURE	36
11.2 TEST SETUP BLOCK DIAGRAM.....	36
11.3 TEST PERFORMANCE	36
11.4 ENVIRONMENTAL CONDITIONS.....	36
11.5 CONTINUOUS CONDUCTED DISTURBANCES TEST DATA	36
12. VOLTAGE DIPS AND INTERRUPTIONS	38
12.1 TEST PROCEDURE	38
12.2 TEST SETUP BLOCK DIAGRAM.....	38
12.3 TEST PERFORMANCE	38
12.4 ENVIRONMENTAL CONDITIONS.....	38
12.5 VOLTAGE DIPS AND INTERRUPTIONS TEST DATA	38
EXHIBIT 1 - EUT PHOTOGRAPHS	39
EXHIBIT 2 - TEST SETUP PHOTOGRAPHS	40

WALTEK



Report version

Version No.	Date of issue	Description
Rev.00	2022-04-02	Original report WTF22X03032422W-3
Rev.01	2022-05-12	Refer the old report WTF22X03032422W-3, updated the USB cable, but the circuit and the electronic construction do not change, declared by the manufacturer. So some of the test data came from the original report.
Rev.02	2022-06-07	Refer the old report WTF22X03032422W-3, updated the USB cable, but the circuit and the electronic construction do not change, declared by the manufacturer. So some of the test data came from the original report.
/	/	/

WALTEK



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Bamboo top wireless charger
Trade Name:	/
Model No.:	MO6563
Adding Model(s):	/
Rated Voltage:	AC230V 50Hz for adapter DC5V/9V
Software Version:	LH-YM-119EV0.1
Hardware Version:	YM-119EV0.1
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
EN 303417	
Frequency Range:	110-205kHz
Radiated H-Field:	33.18dBuA/m(@3m)
Type of Antenna:	Induction Antenna
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	



1.2 Test Standards

The tests were performed according to following standards:

ETSI EN 301 489-1 V2.2.3 (2019-11): Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for Electromagnetic Compatibility.

ETSI EN 301 489-3 V2.1.1 (2019-03): Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with the standard ETSI EN 301489-1, Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements.

1.4 Test Facility

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission/immunity level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Wireless Charging	(Output:5W)
TM2	Wireless Charging	(Output:10W)
TM3	Transmitting	TR, CR, TT, CT for EMS testing (Wireless Output:5W)
TM4	Transmitting	TR, CR, TT, CT for EMS testing (Wireless Output:10W)

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.3	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	XIAOMI	MDY-08-ES	/



1.6 Performance Criteria for EMS

➤ EN 301 489-3, The performance criteria are:

In the table below:

- performance criterion A applies for immunity tests with phenomena of a continuous nature;
- performance criterion B applies for immunity tests with phenomena of a transient nature.

NOTE: Whether a phenomenon is considered transient, continuous or otherwise is indicated in the test procedures for the phenomenon in ETSI EN 301 489-1 [1], clause 9.

Table 2: Performance Requirements

Criterion	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

Where "operate as intended" or "no loss of function" is specified, the EUT shall demonstrate correct functioning as described in clause 5.

Where the EUT has more than one mode of operation (see clause 4.5.2), an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in sufficient modes to confirm there are no such unintentional responses.



1.7 Measurement Uncertainty

Measurement uncertainty	
Parameter	Uncertainty
Uncertainty for Radiated Emission in 3m chamber	@30-200MHz ± 4.52 dB @0.2-1GHz ± 5.56 dB @1-6GHz ± 3.84 dB @6-18GHz ± 3.92 dB
Uncertainty for Conducted Emission	@9-150kHz ± 3.74 dB @0.15-30MHz ± 3.34 dB
Uncertainty for Harmonic test	3.26%
Uncertainty for Flicker test	4.76%
Uncertainty for RS test	21%, k=2
Uncertainty for CS test	29%, k=2
Uncertainty for ESD test	The immunity measurement system uncertainty is within standard requirement and is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.
Uncertainty for EFT test	
Uncertainty for Surges test	
Uncertainty for Voltage Dips, Voltage Variations and Short Interruptions Test	
Uncertainty for PFMF test	



1.8 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
<input checked="" type="checkbox"/> Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input checked="" type="checkbox"/> Chamber A: Above 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
<input type="checkbox"/> Chamber B: Below 1GHz					
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-25	2023-03-24
<input type="checkbox"/> Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
<input checked="" type="checkbox"/> Conducted Room 1#					
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-22	2023-03-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
8-WIRE LISN	Schwarz beck	8158	CAT3-8158-0059	2022-03-22	2023-03-21
8-WIRE LISN	Schwarz beck	8158	CAT5-8158-0117	2022-03-22	2023-03-21
<input type="checkbox"/> Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2022-03-22	2023-03-21
LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21
EMF					
VDH Test Head	AFJ	VDH 30	SC022Z	2022-03-25	2023-03-24
3 Loop Antenna					



Reference No.: WTF22X03032422R2W003

Loop Antenna	ZHINAN	ZN30401	19037	2021-04-26	2023-04-25
Clamp					
Clamp	Luthi	MDS21	3809	2021-04-16	2022-04-15
PFMF					
PMF Generator	LIONCEL	PMF-801C-C	0171101	2022-03-22	2023-03-21
PMF Antenna	LIONCEL	PMF-801C-A	0180302	2022-03-22	2023-03-21
Instantaneous PMF Generator Module	LIONCEL	PMF-801C-T	0171001	2022-03-22	2023-03-21
H/F					
Digital Power Analyzer	California Instrument	CTS	72831	2022-03-22	2023-03-21
Power Source	California Instrument	5001IX-CTS-400	25965	2022-03-22	2023-03-21
ESD					
ESD Generator	LIONCEL	ESD-203B	0170901	2021-04-16	2022-04-15
EFT/SURGE/DIPS					
Transient 2000	EMC PARTNER	TRA2000	863	2022-03-22	2023-03-21
Couple Clamp	EMC PARTNER	CN-EFT1000	513	2022-03-22	2023-03-21
CS					
CONDUCTED IMMUNITY TEST SYSTEM	FRANKONIA	CIT-10/75	126B1247/2013	2022-01-07	2023-01-06
Attenuator	EMTEST	MA-5100/6BF2	1009	2022-03-22	2023-03-21
CDN	Luthi	L-801M2/M3	2665	2022-03-22	2023-03-21
EM Injection Clamp	FCC	F-203I-23mm	91536	2021-04-12	2022-04-11
RS					
Signal Generator	HP	8688B	3438A00604	2022-03-22	2023-03-21
Power Meter	KEITHLEY	3500	1162591	2022-03-22	2023-03-21
Power Meter	KEITHLEY	3500	1121428	2022-03-22	2023-03-21
RF Power Amplifier	MicoTop	MPA-80-1000-250	MPA1906239	2022-03-22	2023-03-21
RF Power Amplifier	MicoTop	MPA-80-1000-100	MPA1906238	2022-03-22	2023-03-21
Antenna	SCHWARZBECK	STLP 9129	9129 114	N/A	N/A
Power Meter	Agilent	E4419B	GB42420578	2022-03-22	2023-03-21



Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
<input checked="" type="checkbox"/> Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input checked="" type="checkbox"/> Chamber A: Above 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
Pre-amplifier	Schwarz beck	BBV 9721	9721-031	2022-03-25	2023-03-24
<input type="checkbox"/> Chamber B: Below 1GHz					
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-25	2023-03-24
<input type="checkbox"/> Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
<input checked="" type="checkbox"/> Conducted Room 1#					
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-22	2023-03-21
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
8-WIRE LISN	Schwarz beck	8158	CAT3-8158-0059	2022-03-22	2023-03-21
8-WIRE LISN	Schwarz beck	8158	CAT5-8158-0117	2022-03-22	2023-03-21
<input type="checkbox"/> Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2022-03-22	2023-03-21
LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21
EMF					
VDH Test Head	AFJ	VDH 30	SC022Z	2022-03-25	2023-03-24
3 Loop Antenna					
Loop Antenna	ZHINAN	ZN30401	19037	2021-04-26	2023-04-25
Clamp					
Clamp	Luthi	MDS21	3809	2022-03-28	2023-03-27



PFMF					
PMF Generator	LIONCEL	PMF-801C-C	0171101	2022-03-22	2023-03-21
PMF Antenna	LIONCEL	PMF-801C-A	0180302	2022-03-22	2023-03-21
Instantaneous PMF Generator Module	LIONCEL	PMF-801C-T	0171001	2022-03-22	2023-03-21
H/F					
Digital Power Analyzer	California Instrument	CTS	72831	2022-03-22	2023-03-21
Power Source	California Instrument	5001IX-CTS-400	25965	2022-03-22	2023-03-21
ESD					
ESD Generator	LIONCEL	ESD-203B	0170901	2022-03-28	2023-03-27
EFT/SURGE/DIPS					
Transient 2000	EMC PARTNER	TRA2000	863	2022-03-22	2023-03-21
Couple Clamp	EMC PARTNER	CN-EFT1000	513	2022-03-22	2023-03-21
CS					
CONDUCTED IMMUNITY TEST SYSTEM	FRANKONIA	CIT-10/75	126B1247/2013	2022-01-07	2023-01-06
Attenuator	EMTEST	MA-5100/6BF2	1009	2022-03-22	2023-03-21
CDN	Luthi	L-801M2/M3	2665	2022-03-22	2023-03-21
CDN	LIONCEL	CDN-T8	0210401	2022-03-25	2023-03-24
EM Clamp	TESEQ	KEMZ801A	45028	2022-03-25	2023-03-24
RS					
Signal Generator	HP	8688B	3438A00604	2022-03-22	2023-03-21
Power Meter	KEITHLEY	3500	1162591	2022-03-22	2023-03-21
Power Meter	KEITHLEY	3500	1121428	2022-03-22	2023-03-21
RF Power Amplifier	MicoTop	MPA-80-1000-250	MPA1906239	2022-03-22	2023-03-21
RF Power Amplifier	MicoTop	MPA-80-6000-100	MPA1906238	2022-03-22	2023-03-21
Antenna	SCHWARZBECK	STLP 9129	9129 114	N/A	N/A
Power Meter	Agilent	E4419B	GB42420578	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.



2. SUMMARY OF TEST RESULTS

Standards	Reference	Description of Test Item	Result
ETSI EN 301 489-1	8.2	Radiated Emissions	Pass
	8.3	Conducted Emissions for DC Power Port	N/A
	8.4	Conducted Emissions for AC Power Port	Pass
	8.5	Harmonic Current Emissions	N/A
	8.6	Voltage Fluctuations and Flicker	Pass
	8.7	Telecommunication Ports	N/A
	9.2	Radio Frequency Electromagnetic Field	Pass
	9.3	Electrostatic Discharge	Pass
	9.4	Fast Transients, Common Mode	Pass
	9.5	Radio Frequency, Common Mode	Pass
	9.6	Transient and Surges in the Vehicular Environment	N/A
	9.7	Voltage Dips and Interruptions	Pass
	9.8	Surges	Pass

Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.

N/A: Not applicable.




3. Conducted Emissions

3.1 Test Procedure

Test is conducting under the description of EN55032 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.

3.2 Basic Test Setup Block Diagram

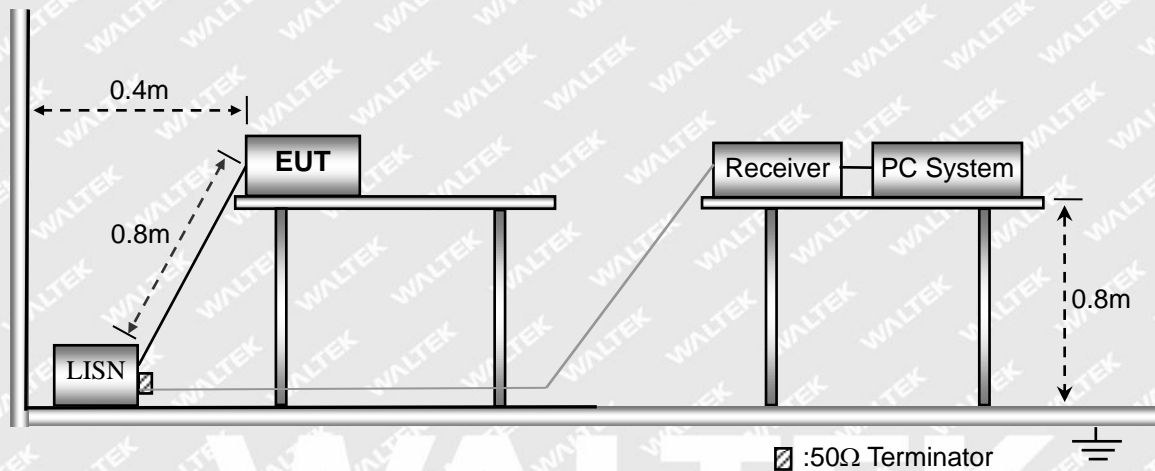

3.3 Environmental Conditions


Temperature:	23.5 °C
Relative Humidity:	54 %
ATM Pressure:	1015 mbar

3.4 Conducted Emissions Test Data

Note: Only show the worst case in the test report.




Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

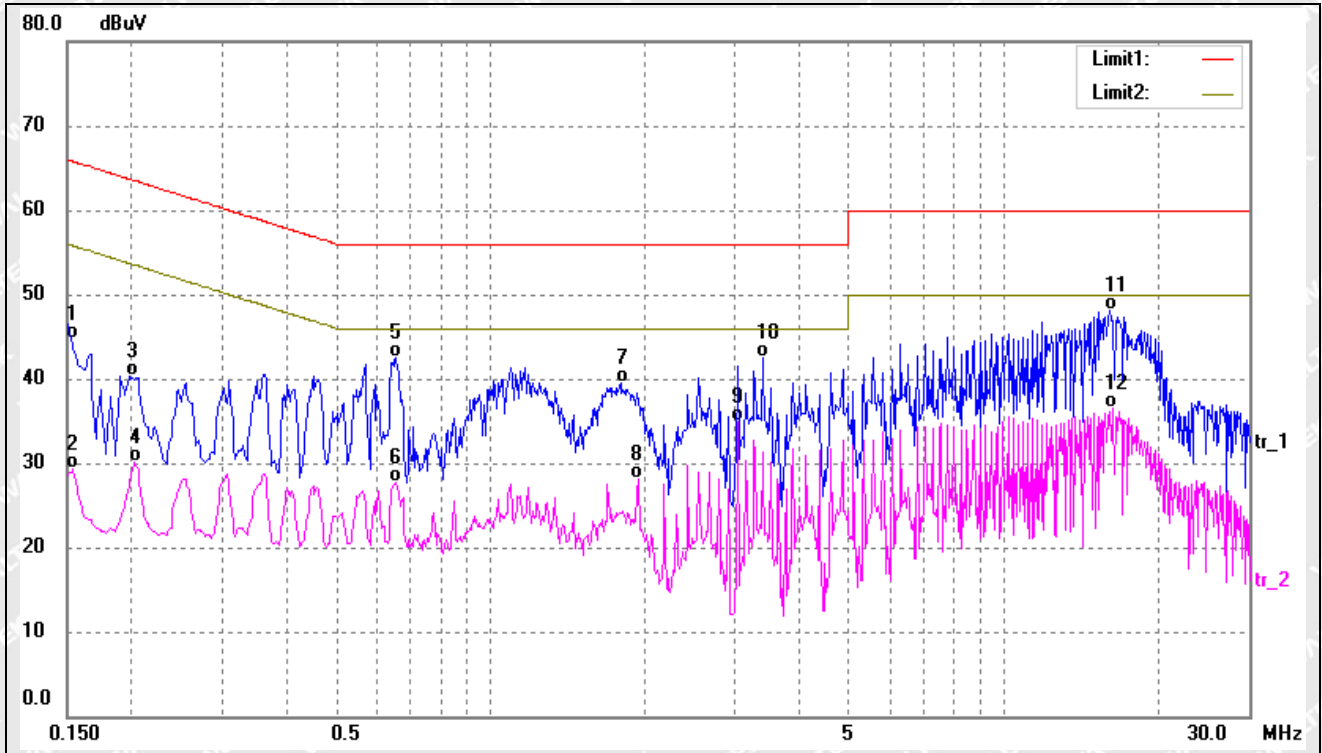

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1524	34.38	10.37	44.75	65.86	-21.11	QP
2	0.1539	18.90	10.37	29.27	55.78	-26.51	AVG
3	0.1980	29.88	10.37	40.25	63.69	-23.44	QP
4	0.2020	19.67	10.37	30.04	53.52	-23.48	AVG
5	0.6540	32.19	10.35	42.54	56.00	-13.46	QP
6	0.6540	17.31	10.35	27.66	46.00	-18.34	AVG
7	1.7980	29.35	10.22	39.57	56.00	-16.43	QP
8	1.9420	18.04	10.15	28.19	46.00	-17.81	AVG
9*	3.0340	24.90	10.09	34.99	46.00	-11.01	AVG
10	3.3980	32.43	10.07	42.50	56.00	-13.50	QP
11	16.1340	37.85	10.17	48.02	60.00	-11.98	QP
12	16.2580	26.32	10.18	36.50	60.00	-23.50	QP




Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

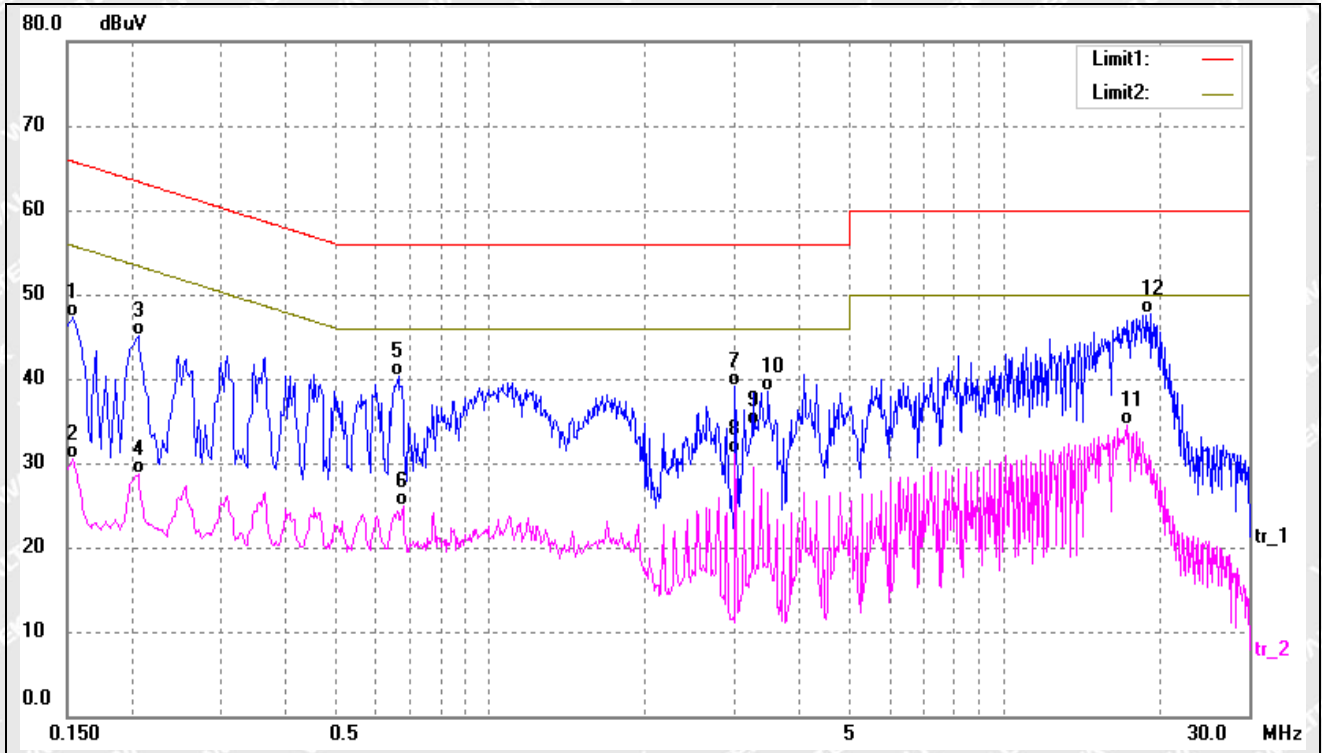

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	36.92	10.37	47.29	65.78	-18.49	QP
2	0.1539	20.06	10.37	30.43	55.78	-25.35	AVG
3	0.2060	34.82	10.37	45.19	63.36	-18.17	QP
4	0.2060	18.29	10.37	28.66	53.36	-24.70	AVG
5	0.6620	29.97	10.36	40.33	56.00	-15.67	QP
6	0.6780	14.44	10.37	24.81	46.00	-21.19	AVG
7	3.0059	29.09	10.09	39.18	56.00	-16.82	QP
8	3.0059	20.98	10.09	31.07	46.00	-14.93	AVG
9*	3.2460	24.39	10.08	34.47	46.00	-11.53	AVG
10	3.4860	28.38	10.07	38.45	56.00	-17.55	QP
11	17.4420	24.27	10.20	34.47	50.00	-15.53	AVG
12	19.3660	37.39	10.24	47.63	60.00	-12.37	QP




Test mode:	TM2	Polarity:	Neutral
------------	-----	-----------	---------

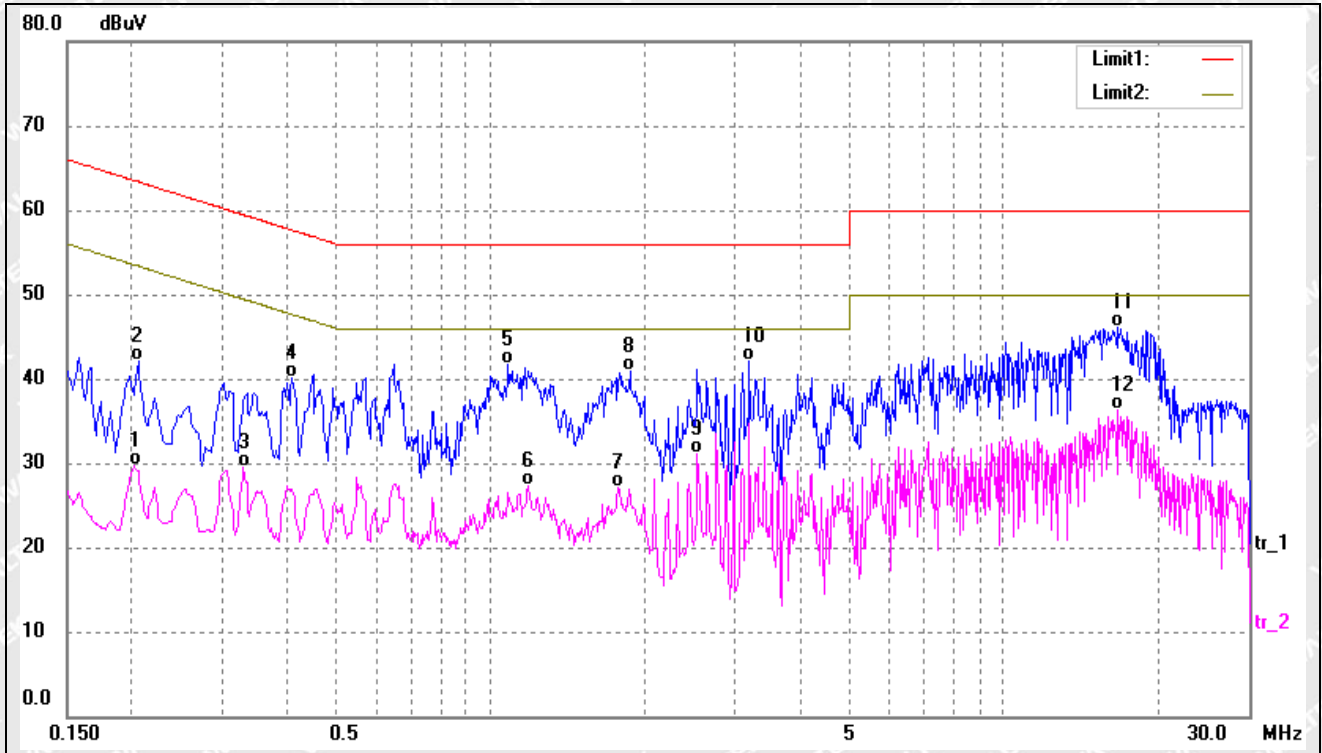

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2020	19.27	10.37	29.64	53.52	-23.88	AVG
2	0.2060	31.64	10.37	42.01	63.36	-21.35	QP
3	0.3300	19.08	10.33	29.41	49.45	-20.04	AVG
4	0.4100	29.73	10.29	40.02	57.65	-17.63	QP
5	1.0859	31.16	10.53	41.69	56.00	-14.31	QP
6	1.1860	16.79	10.48	27.27	46.00	-18.73	AVG
7	1.7780	16.78	10.23	27.01	46.00	-18.99	AVG
8	1.8740	30.79	10.18	40.97	56.00	-15.03	QP
9	2.5380	21.05	10.11	31.16	46.00	-14.84	AVG
10	3.2020	32.00	10.08	42.08	56.00	-13.92	QP
11	16.6700	35.94	10.18	46.12	60.00	-13.88	QP
12*	16.6700	26.09	10.18	36.27	50.00	-13.73	AVG



Test mode:	TM2	Polarity:	Line
------------	-----	-----------	------

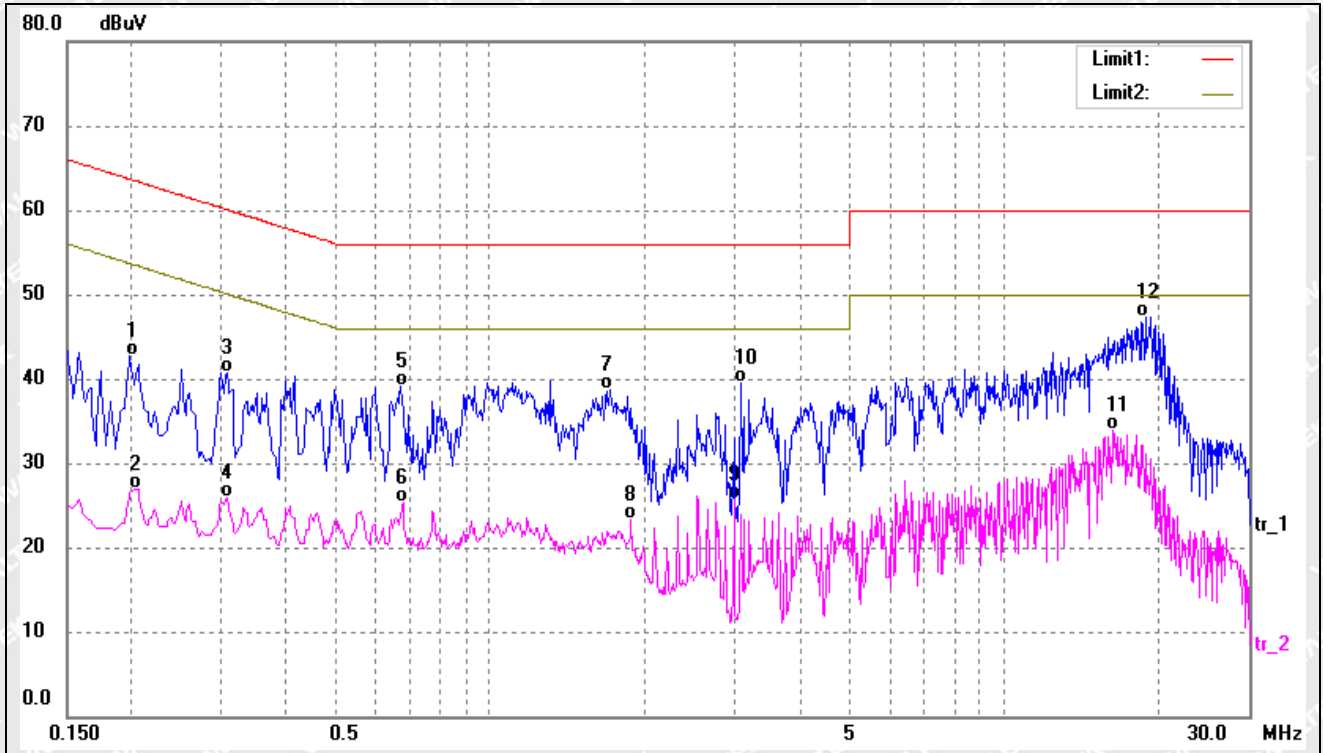


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1980	32.32	10.37	42.69	63.69	-21.00	QP
2	0.2020	16.49	10.37	26.86	53.52	-26.66	AVG
3	0.3060	30.47	10.33	40.80	60.08	-19.28	QP
4	0.3060	15.63	10.33	25.96	50.08	-24.12	AVG
5	0.6700	28.66	10.36	39.02	56.00	-16.98	QP
6	0.6780	14.98	10.37	25.35	46.00	-20.65	AVG
7	1.7140	28.55	10.25	38.80	56.00	-17.20	QP
8	1.8780	13.21	10.18	23.39	46.00	-22.61	AVG
9	2.9820	15.64	10.09	25.73	46.00	-20.27	AVG
10	3.0860	29.51	10.08	39.59	56.00	-16.41	QP
11	16.2340	23.67	10.17	33.84	50.00	-16.16	AVG
12*	18.8819	37.16	10.23	47.39	60.00	-12.61	QP



4. Radiated Emissions

4.2 Test Procedure

Test is conducting under the description of EN55032 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.

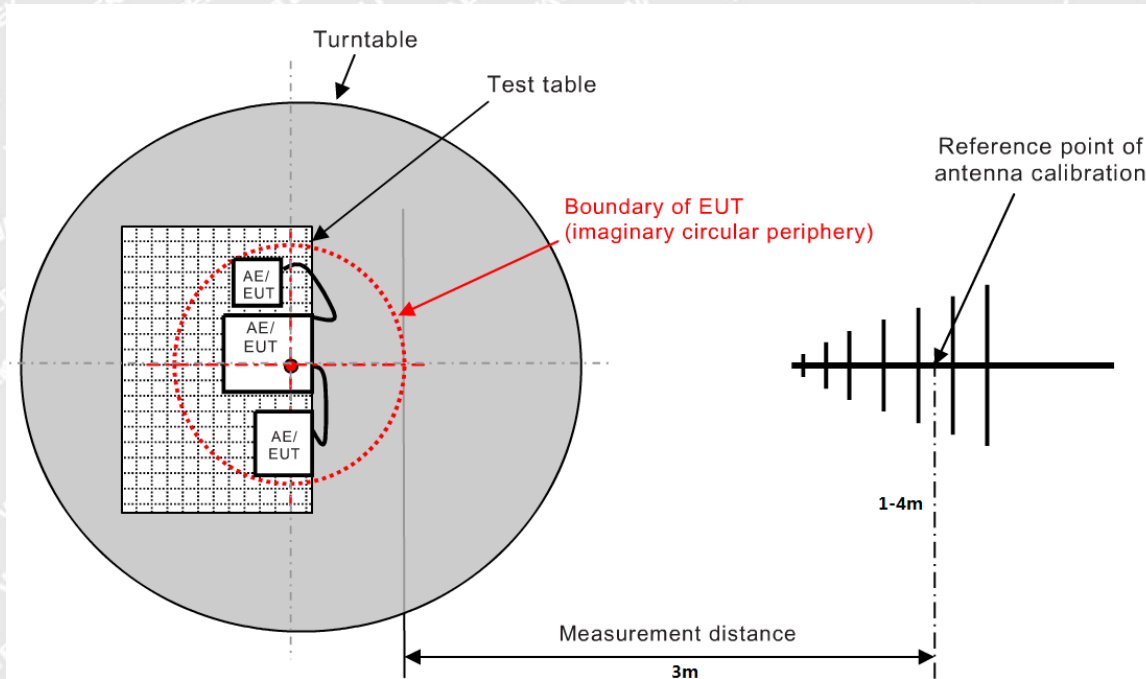

4.2 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit for Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{EN 301489 Class B Limit}$$



4.3 Environmental Conditions


Temperature:	22.5° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.4 Summary of Test Results/Plots

Note: Only show the worst case in the test report

➤ 30MHz to 1GHz


Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

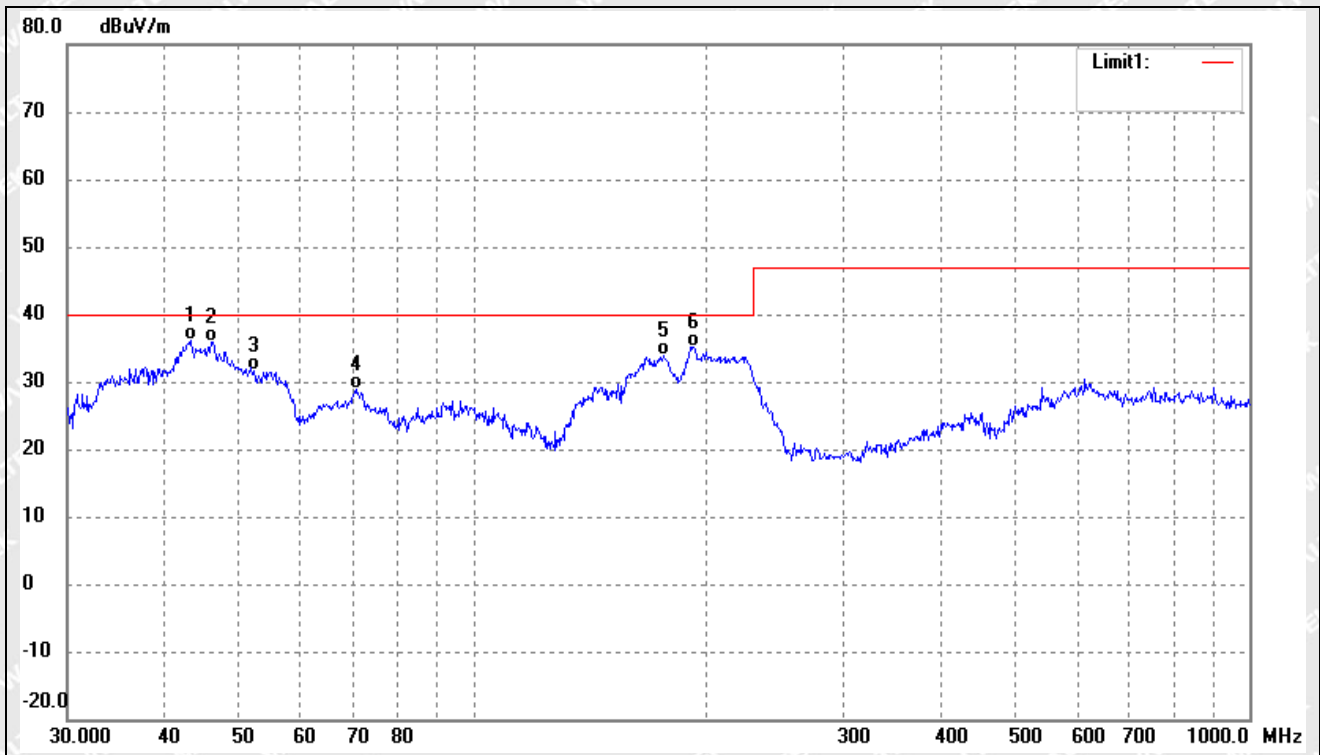

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.2017	43.19	-7.00	36.19	40.00	-3.81	-	-	QP
2	46.0163	42.97	-6.98	35.99	40.00	-4.01	-	-	QP
3	52.2079	38.92	-7.29	31.63	40.00	-8.37	-	-	QP
4	70.5836	39.00	-10.20	28.80	40.00	-11.20	-	-	QP
5	175.6516	45.33	-11.47	33.86	40.00	-6.14	-	-	QP
6	192.4184	45.12	-9.96	35.16	40.00	-4.84	-	-	QP




Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

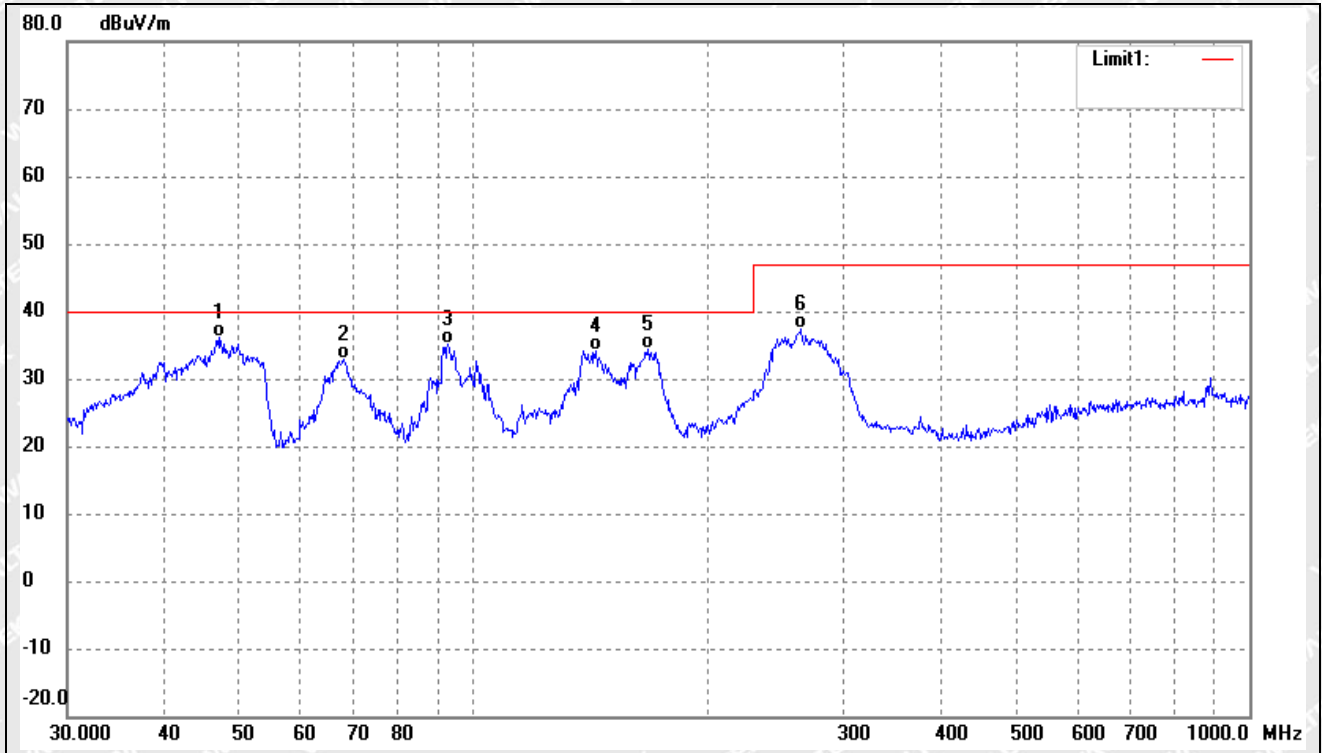

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.9947	43.07	-6.97	36.10	40.00	-3.90	-	-	QP
2	68.1513	42.73	-9.85	32.88	40.00	-7.12	-	-	QP
3	92.7870	45.20	-10.07	35.13	40.00	-4.87	-	-	QP
4	143.8293	46.51	-12.40	34.11	40.00	-5.89	-	-	QP
5	167.8241	46.19	-11.82	34.37	40.00	-5.63	-	-	QP
6	264.7456	45.20	-7.91	37.29	47.00	-9.71	-	-	QP




Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

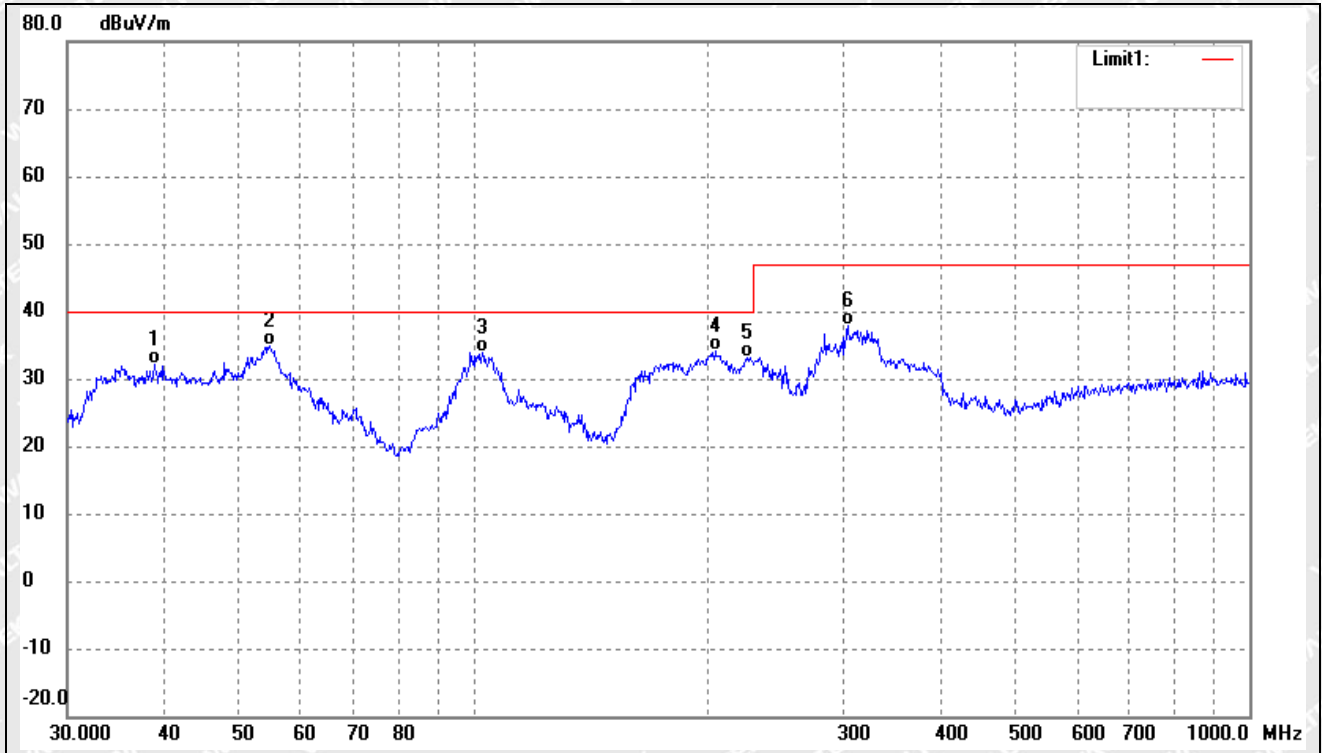

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.8879	39.35	-7.27	32.08	40.00	-7.92	-	-	QP
2	54.6428	42.45	-7.64	34.81	40.00	-5.19	-	-	QP
3	102.7192	42.60	-8.77	33.83	40.00	-6.17	-	-	QP
4	204.9550	43.61	-9.56	34.05	40.00	-5.95	-	-	QP
5	225.3078	42.07	-9.00	33.07	40.00	-6.93	-	-	QP
6	303.5437	44.78	-6.85	37.93	47.00	-9.07	-	-	QP



Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

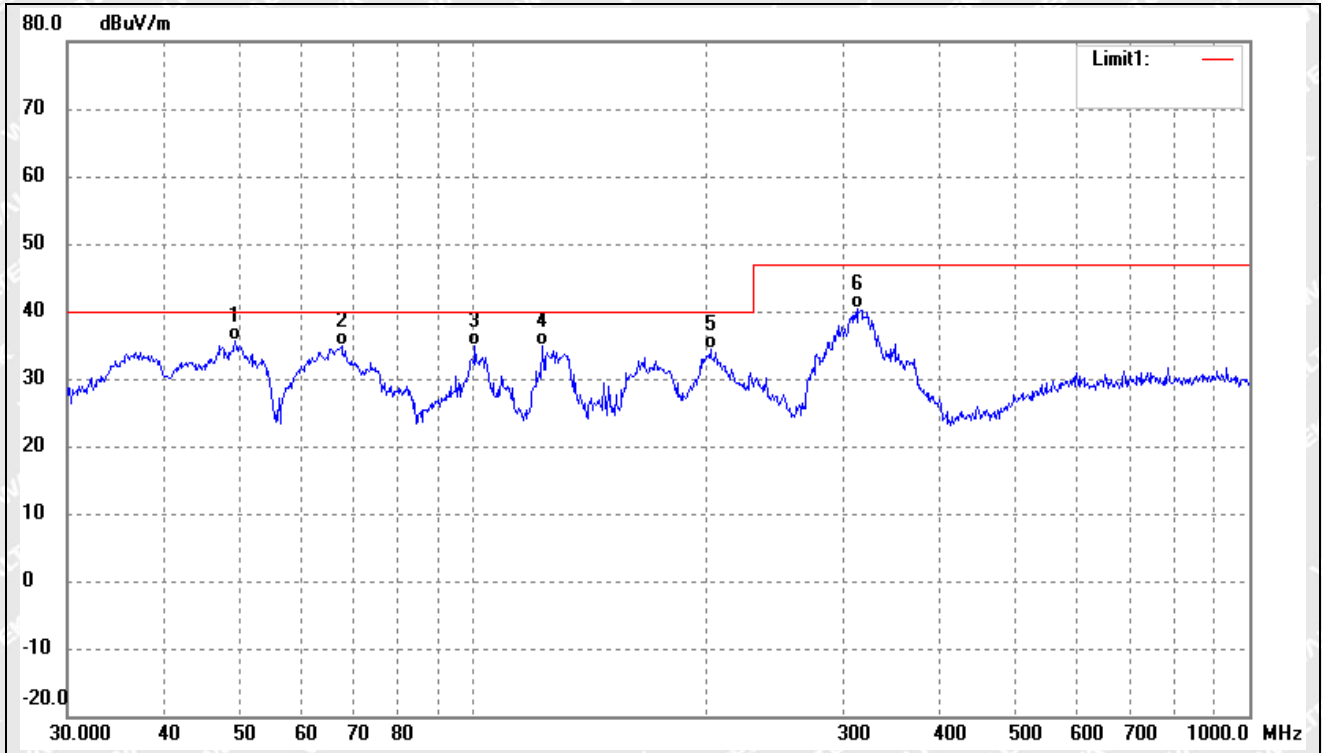

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.3594	42.66	-6.96	35.70	40.00	-4.30	-	-	QP
2	67.6751	44.71	-9.77	34.94	40.00	-5.06	-	-	QP
3	100.5806	43.63	-8.73	34.90	40.00	-5.10	-	-	QP
4	122.8340	44.88	-10.12	34.76	40.00	-5.24	-	-	QP
5	202.1005	44.05	-9.65	34.40	40.00	-5.60	-	-	QP
6	313.2760	46.90	-6.54	40.36	47.00	-6.64	-	-	QP


Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

5. Harmonic Current Emissions

5.1 Test Procedure

Test is conducting under the description of EN 61000-3-2.

5.2 Test Setup Block Diagram

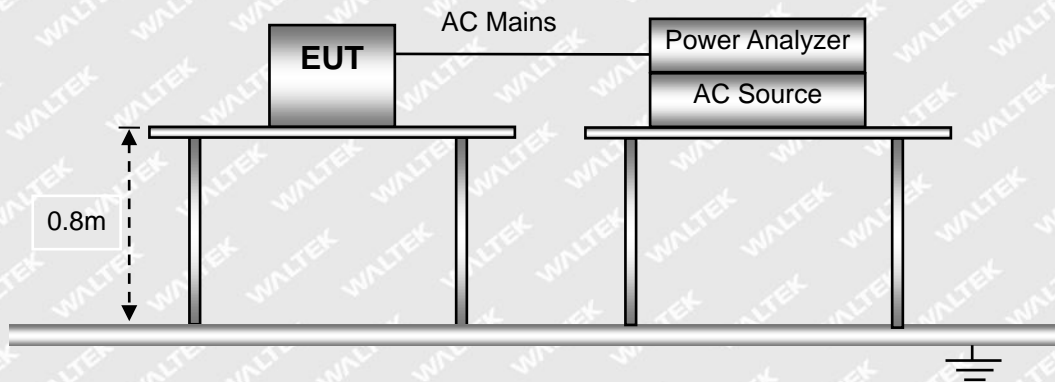

5.3 Test Standards

EN61000-3-2, Clause 7.1 Limits for Class A equipment.

5.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1015 mbar

5.5 Harmonic Current Emissions Test Data

According to Clause 7 of EN61000-3-2, the EUT rated power is less than 75W, belong to 'equipment with a rated power of 75W or less', therefore 'limits are not specified in this edition of the standards'. It is deem to full fit the requirements of the standards.

Result: The EUT complies with the requirements of this section.




6. Voltage Fluctuation and Flicker

6.1 Test Procedure

Test is conducting under the description of EN 61000-3-3.

6.2 Test Setup Block Diagram

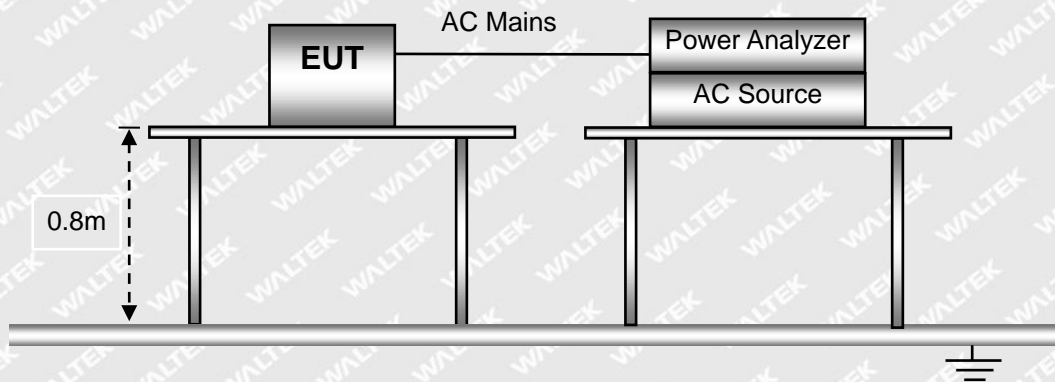

6.3 Test Standards

EN61000-3-3, Limit: Clause 5.

6.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1015mbar

6.5 Voltage Fluctuation and Flicker Test Data

Result: The EUT is compliance with the requirements of this section.




Test mode:	TM1
------------	-----

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

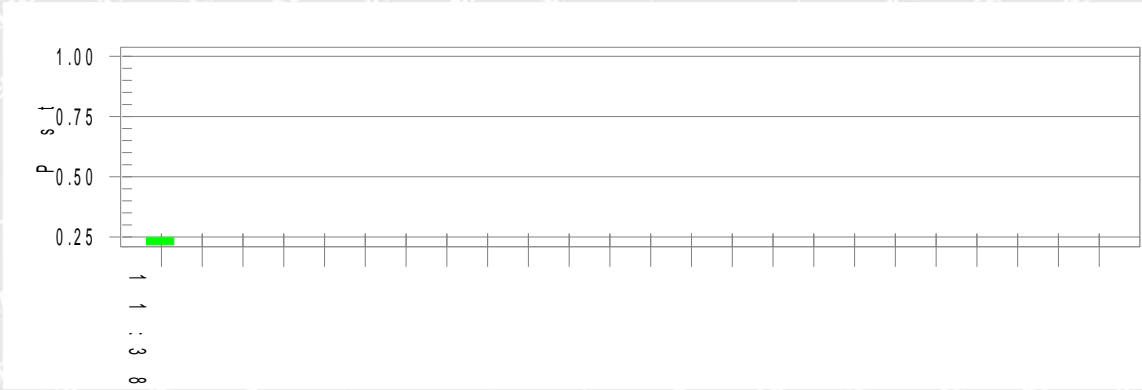

Plt and limit line

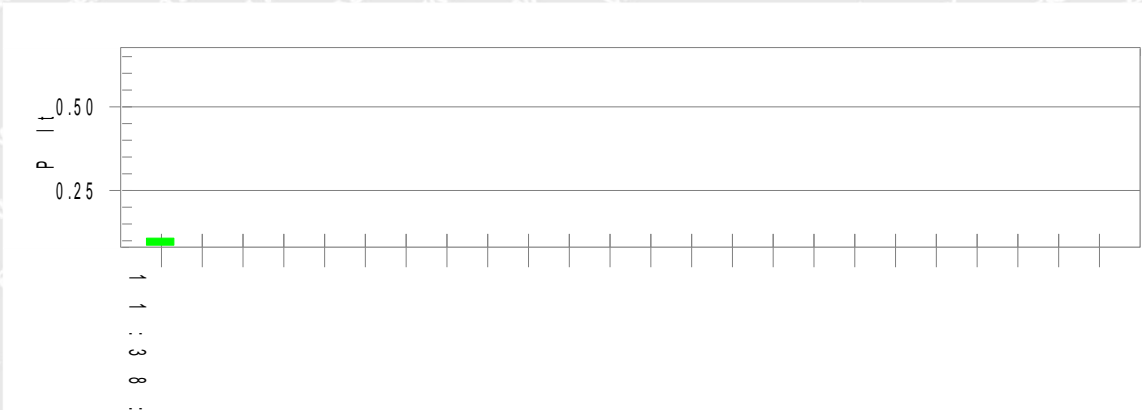

Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.01

Highest dt (%):

Test limit (%):

T-max (mS): 0

Test limit (mS): 500.0 Pass

Highest dc (%): 0.00

Test limit (%): 3.30 Pass

Highest dmax (%): 0.00

Test limit (%): 4.00 Pass

Highest Pst (10 min. period): 0.247

Test limit: 1.000 Pass

Highest Plt (2 hr. period): 0.108


Test limit: 0.650 Pass

7. Electrostatic Discharge (ESD)

7.1 Test Procedure

Test is conducting under the description of EN 61000-4-2.

7.2 Test Setup Block Diagram

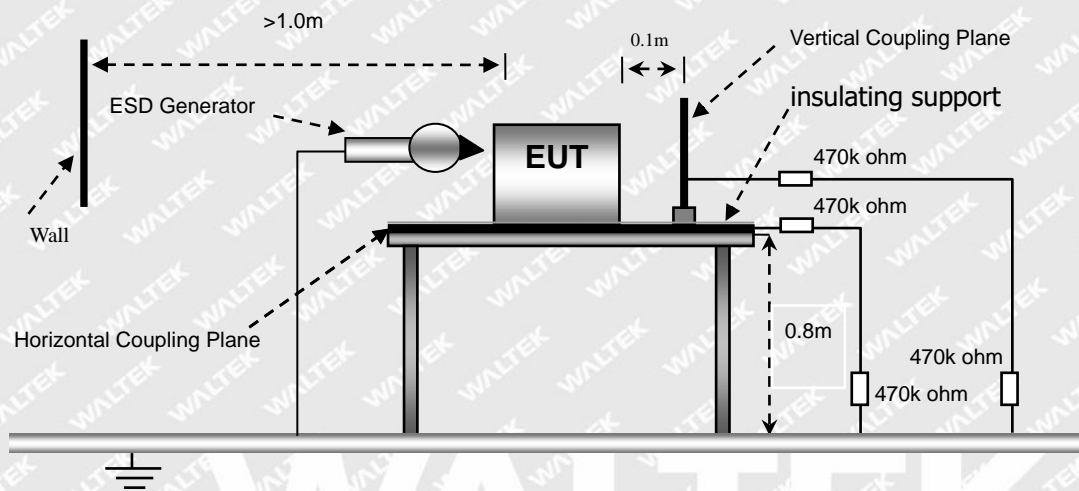

7.3 Test Performance

Performance Criterion:	Mode	Verdict
		TM1-TM4

Note: TM3-TM4 for TT,TR

7.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

7.5 Electrostatic Discharge Immunity Test Data



Test mode	TM1-TM4							
EN 61000-4-2 Test Points	Test Levels (kV)							
	-2	+2	-4	+4	-6	+6	-8	+8
Air Discharge								
Gap	A	A	A	A	A	A	A	A
Surface	A	A	A	A	A	A	A	A
Button	A	A	A	A	A	A	A	A
Direct Contact Discharge								
USB-C Port	A	A	A	A	/	/	/	/
Indirect Contact Discharge								
HCP (6 Sides)	A	A	A	A	/	/	/	/
VCP (4 Sides)	A	A	A	A	/	/	/	/

Test Result: Pass


WALTEK

8. Radio Frequency Electromagnetic Field (R/S)

8.1 Test Procedure

Test is conducting under the description of EN 61000-4-3.

8.2 Test Setup Block Diagram

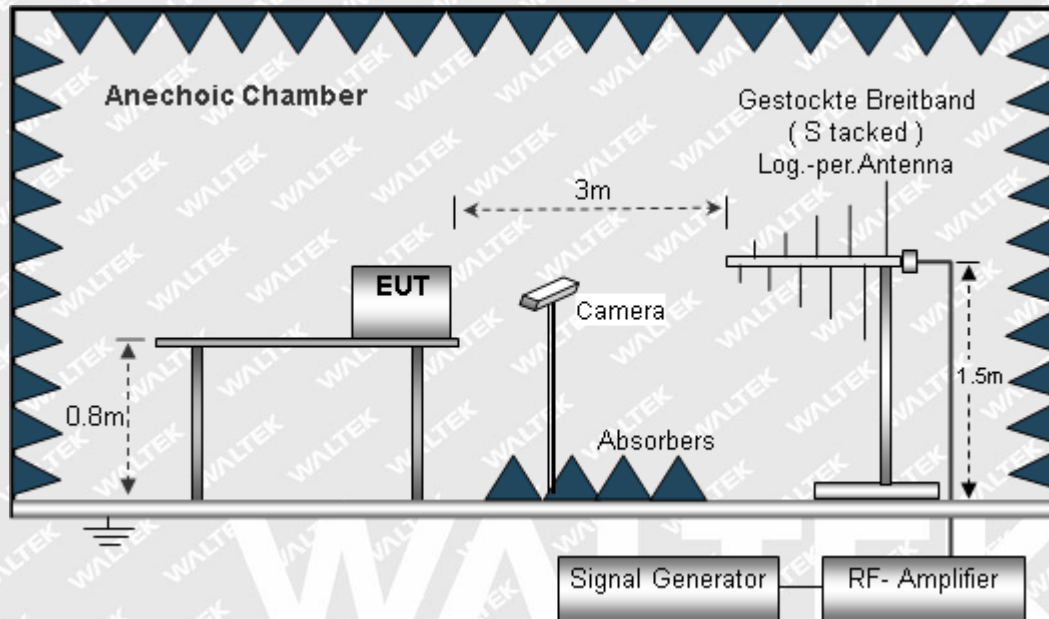

8.3 Test Performance

Performance Criterion:	Mode	Verdict
		TM1-TM4

Note: TM3-TM4 for CT,CR

8.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

8.5 Continuous Radiated Disturbances Test Data

Frequency step: 1% of fundamental

Dwell time: 1 second

Modulation: AM by 1kHz sine wave with 80% modulation depth



Test mode		TM1-TM4							
Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A
1000-3000	3	A	A	A	A	A	A	A	A
3000-6000	3	A	A	A	A	A	A	A	A

Test Result: Pass

WALTEK




9. Fast Transients, Common Mode (EFT)

9.1 Test Procedure


Test is conducting under the description of EN 61000-4-4.

9.2 Test Setup Block Diagram

For AC Mains or DC Ports:

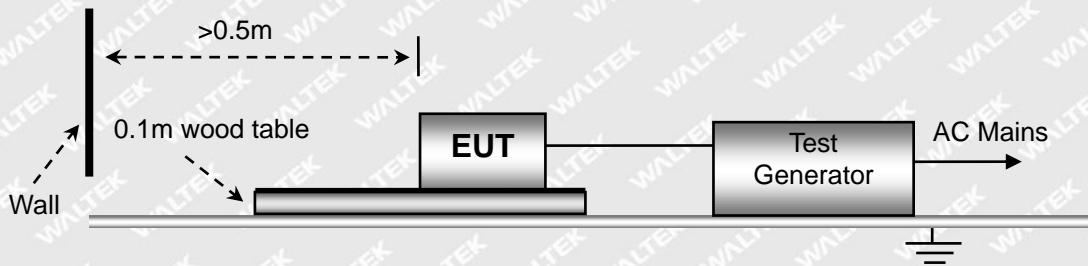

For Signal or Telecommunication Ports:

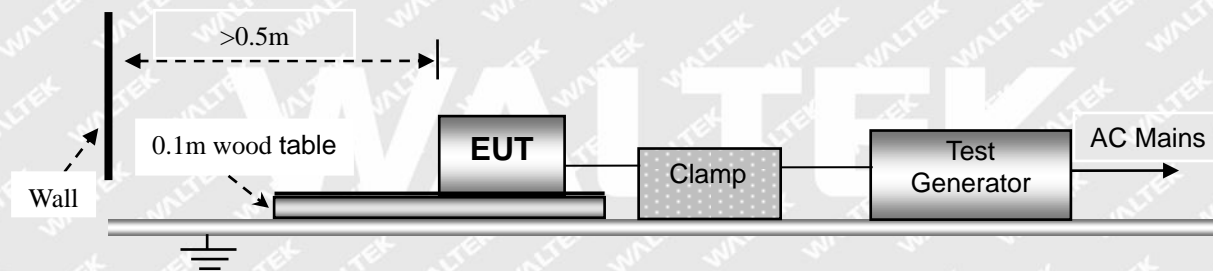

9.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	B
Note: TM3-TM4 for TT,TR		

9.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

9.5 Electrical Fast Transients Test Data



Test Mode		TM1-TM4							
EN 61000-4-4 Test Line		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
AC Main Power port	L	A	A	A	A	/	/	/	/
	N	A	A	A	A	/	/	/	/
	PE	/	/	/	/	/	/	/	/
	L-N	A	A	A	A	/	/	/	/
	L-PE	/	/	/	/	/	/	/	/
	N-PE	/	/	/	/	/	/	/	/
	L-N-PE	/	/	/	/	/	/	/	/
Signal ports	/	/	/	/	/	/	/	/	

Test Result: Pass

WALTEK




10. Surges

10.1 Test Procedure


Test is conducting under the description of EN 61000-4-5.

10.2 Test Setup Block Diagram

For AC Mains or DC Ports:

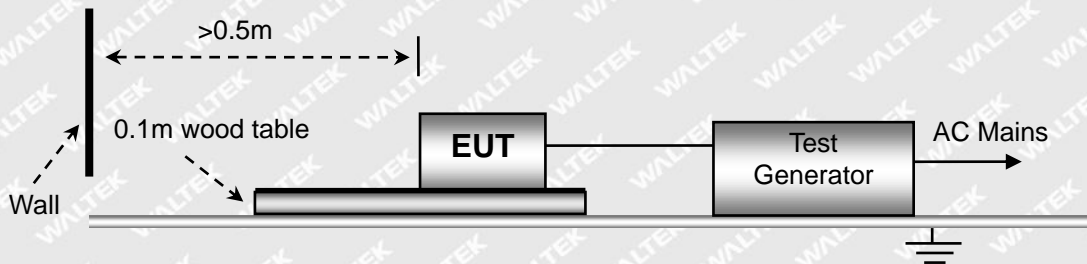

For Signal or Telecommunication Ports:

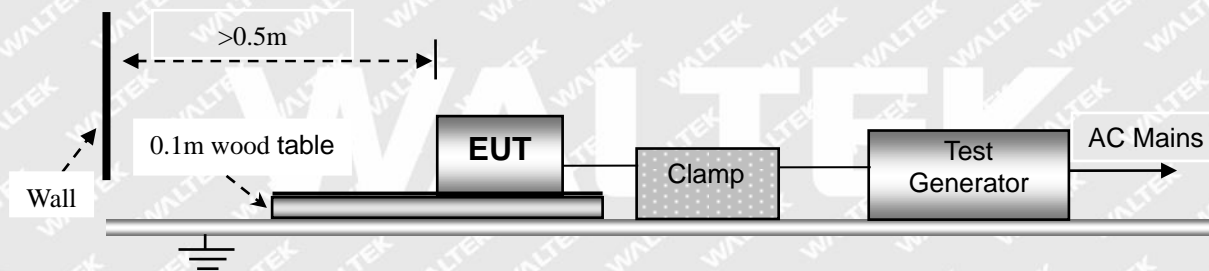

10.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	B
Note: TM3-TM4 for TT,TR		

10.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

10.5 Surge Test Data



Test Mode	TM1-TM4			
Voltage	Poll	Path	Pass	Fail
0.5kV	±	L-N	A	/
1kV	±	L-N	A	/
2kV	±	L-N, L-PE, N-PE	/	/
4kV	±	L-N, L-PE, N-PE	/	/

Test Result: Pass

WALTEK




11. Radio Frequency, Common Mode (C/S)

11.1 Test Procedure


Test is conducting under the description of EN 61000-4-6.

11.2 Test Setup Block Diagram

For AC Mains or DC Input:

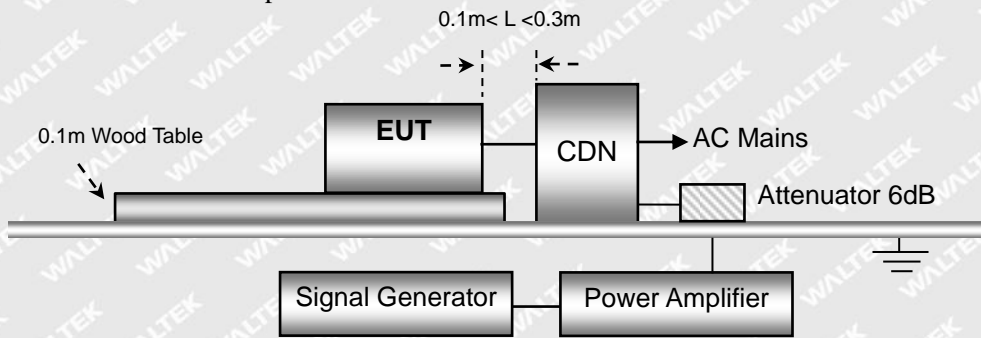

For Signal or Telecommunication Ports:

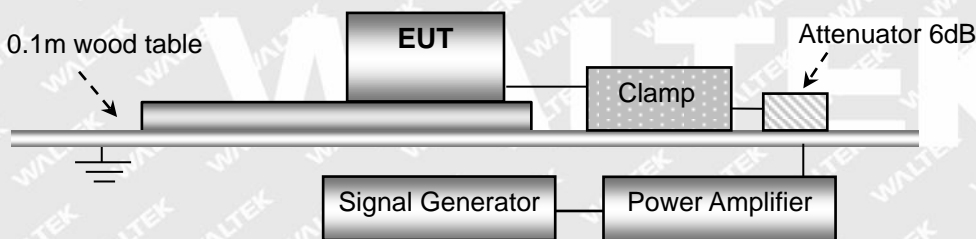

11.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	A
Note: TM3-TM4 for CT,CR		

11.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

11.5 Continuous Conducted Disturbances Test Data

Sweep frequency range: 150kHz~80MHz

Frequency step: 1% of fundamental

Dwell time: 1 second



Test Mode		TM1-TM4		
Level	Voltage (V) (rms, unmodulated)	Modulation:	Pass	Fail
1	1	AM 80%, 1kHz sinewave	/	/
2	3	AM 80%, 1kHz sinewave	A	/
3	10	AM 80%, 1kHz sinewave	/	/
X	Special	/	/	/

Test Result: Pass

WALTEK




12. Voltage Dips and Interruptions

12.1 Test Procedure

Test is conducting under the description of EN 61000-4-11.

12.2 Test Setup Block Diagram

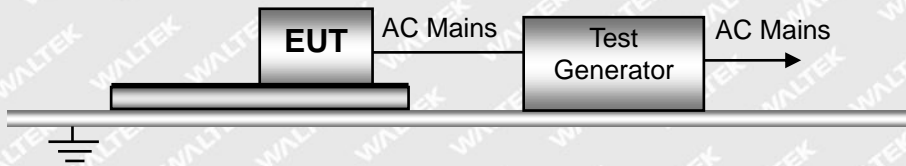

12.3 Test Performance

Performance Criterion:	Mode	Verdict
	TM1-TM4	B for voltage dip/ C for voltage interruption
Note: TM3-TM4 for TT,TR		

12.4 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

12.5 Voltage Dips And Interruptions Test Data

U: Voltage dips in % U_T (U_T is rated voltage for the EUT)

T: Test duration

Level	U	T	Phase Angle	N	Pass	Fail
1	100%	10ms	0/90/180/270	3	B	/
2	100%	20ms	0/90/180/270	3	B	/
3	30%	500ms	0/90/180/270	3	B	/
4	100%	5000ms	0/90/180/270	3	B	/

Test Result: Pass



EXHIBIT 1 - EUT PHOTOGRAPHS

Please refer to “ANNEX”.

WALTEK

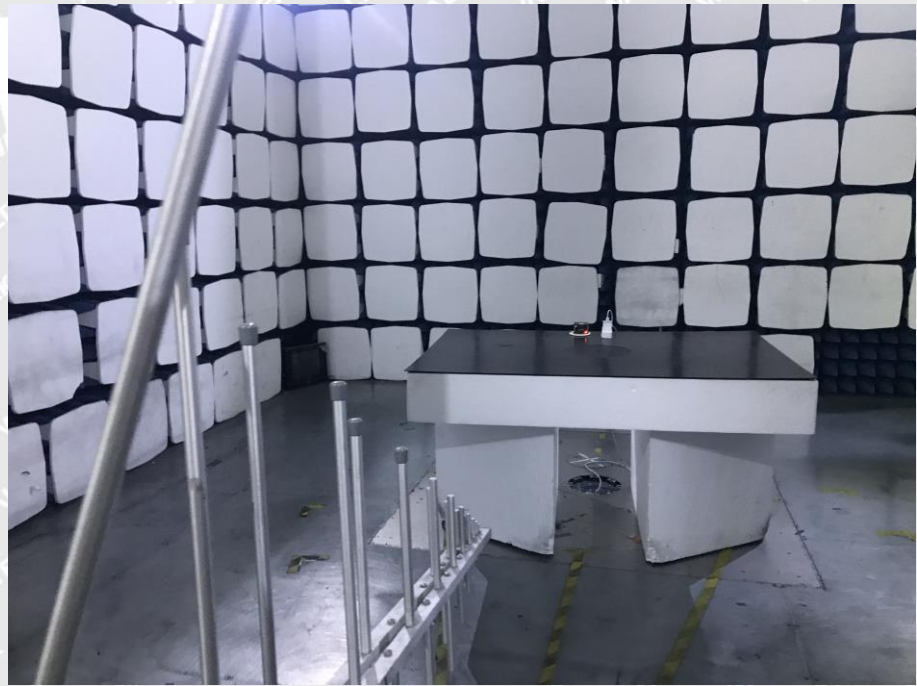


EXHIBIT 2 - TEST SETUP PHOTOGRAPHS

**Conducted Emission
Test Setup**



**Radiation Emission Test
View(30MHz to 1GHz)**






Flicker Test View



EN 61000-4-2 Test View

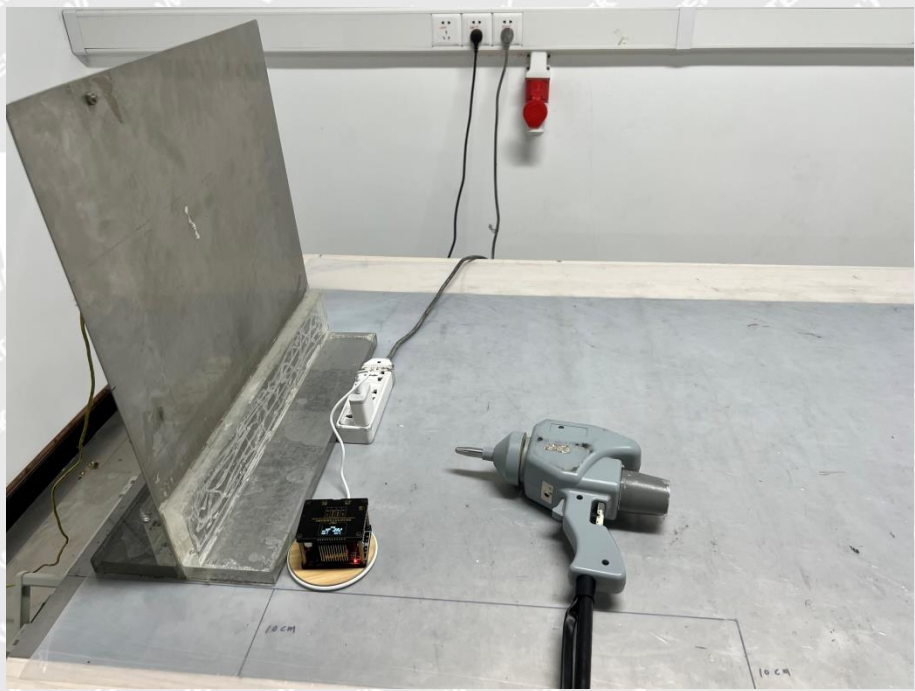



EN 61000-4-2 Test View




EN 61000-4-2 Test View





EN 61000-4-3 Test View

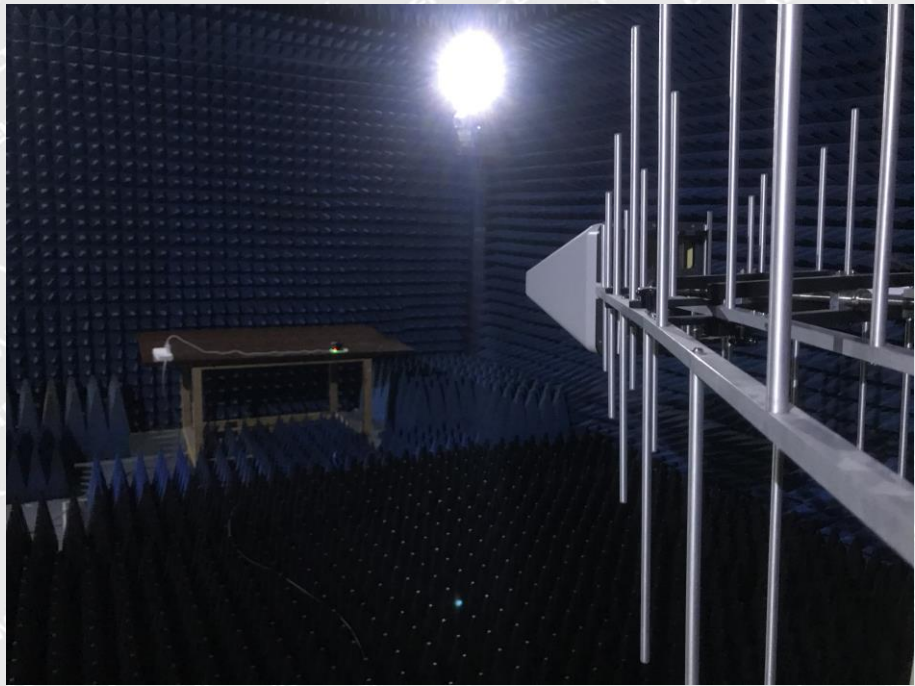


EN 61000-4-4/5/11 Test View





EN 61000-4-6 Test View

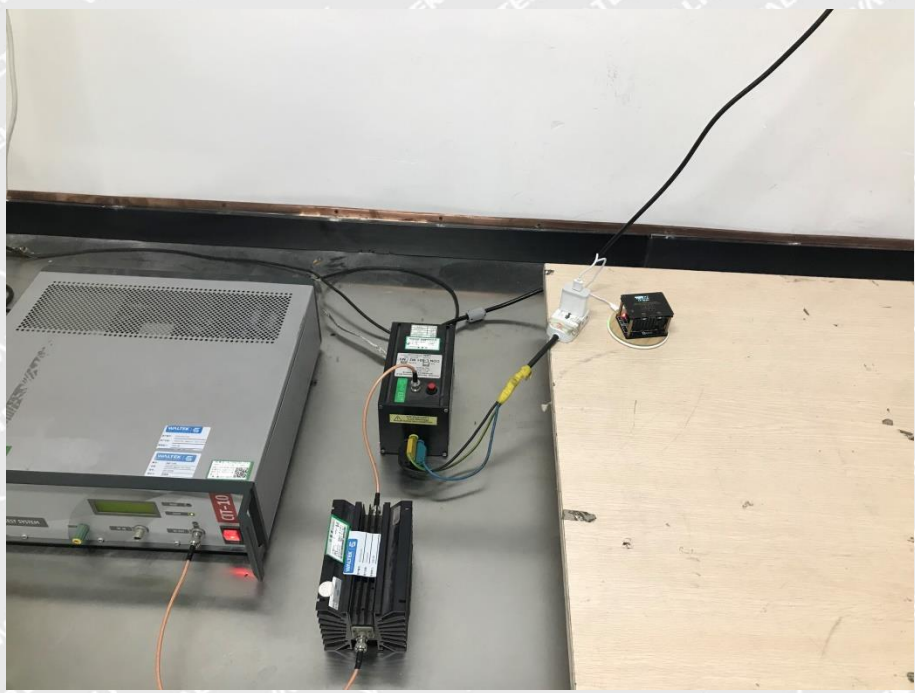

***** END OF REPORT *****

WALTEK